




T8 Fixture Tube TPR600 1200 1500

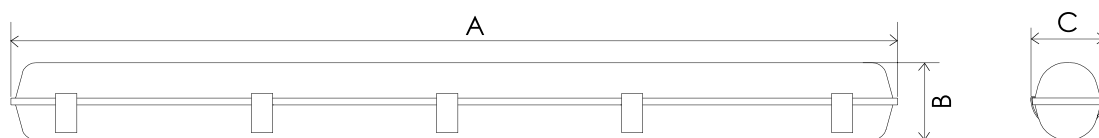

Introduction

- TLI Tri-proof fixture are of IP65 water-proof, dust-proof and anti-corrosion.
- Top quality fire-rated PC housing with good heat resistance and high strength, up to 90% light transmittance.
- Wide input voltage range AC100-277V, double and single T8 tube for option, best choice for indoor and outdoor applications.
- Application:
Commercial lighting: Supermarket/Shops/Exhibition hall/Parking place/gas station.
Public lighting: library/School/Tunnel/Metro/Bus/Train/Bus station, railway/station, airport.
Industrial lighting: Factory/Warehouse and etc.

Technical Specifications

Voltage: AC100-240V	Lifespan: 40000hrs
Power: 9W / 18W / 25W / 36W	CRI: ≥ 80
Power Factor: ≥ 0.9	IP: 65
Beam angle: 120°	Dimmable: No
CCT: 3000K 4000K 5000K 5700K	Surface color: Clear

Appearance Parameters

Model	Dimension (mm)			Product Size (mm)	Net Weight (kg)	Lumen ($\pm 5\%$)
	A	B	C			
TLI-TPRA60-9W	660	95	95	660x95x95	0.91	750-780
TLI-TPRA120-18W	1260	95	95	1260x95x95	1.75	1640
TLI-TPRA150-25W	1560	95	95	1560x95x95	2.05	2000
TLI-TPRB60-18W	660	95	138	660x138x95	1.32	1500-1570
TLI-TPRB120-36W	1260	95	138	1260x138x95	2.6	3000-3140

SPECIFICATIONS ABOVE ARE FOR REFERENCES ONLY AND MAY VARY WITHOUT PRIOR NOTICE