



# TLI-BL06/12

STANDARD BATTEN WITH  
TUBE DIFFUSER/ WIRE GUARDS

## TECHNICAL

Materials of Optics	PMMA Diffuser Wire Guards
Materials of Housing	Steel
Light Source	-
Color Temperature	5500-6000k
Luminous Efficiency@4000K	97Lm/W
CRI	>70
Beam Angle(°)	120
UGR	-
Lifetime(hr)	40,000h
Product Finishing	White


## FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Dimming Option	N/A
Functions	-
Ingress Protection (IP Rating)	IP 20
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN
TLI-BL12-36W	36W	AC200-240V	1230x124x90	3500lm
TLI-BL06-18W	18W	AC200-240V	630x124x90	1950lm

## OPTICS

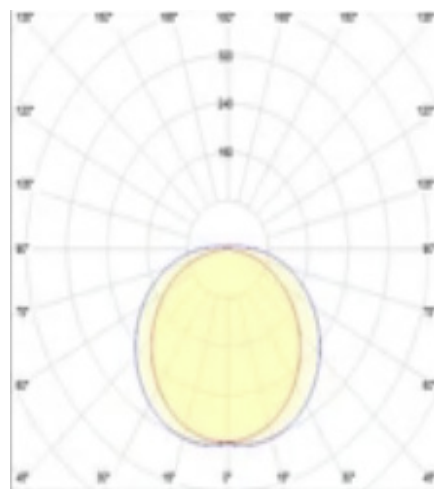

## INSTALLATION & ACCESSORIES

