

TLI-CL10201A

DOWNLIGHT

TECHNICAL

Materials of Optics	PMMA
Materials of Housing	Aluminum Die-casting
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	100lm/W
CRI	≥80/90/97
Beam Angle(°)	36°/ 60°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White/ Black/ Silver/ Nickel brushed


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Power Factor(PF)	≥0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-CL10201A-2.5-5W	10W	AC200-240V	Ø80x30	Ø68-72	530lm	0.24	50PCS
TLI-CL10201A-2.5-8W	20W	AC200-240V	Ø80x30	Ø68-72	815lm	0.24	50PCS
TLI-CL10201B-2.5-10W	10W	AC200-240V	Ø90x39.3	Ø75-80	1000lm	0.25	50PCS
TLI-CL10201-3-10W	10W	AC200-240V	Ø110x49.5	Ø90-95	1000lm	0.40	30PCS
TLI-CL10201-3-13W	13W	AC200-240V	Ø110x49.5	Ø90-95	1350lm	0.40	30PCS

OPTICS

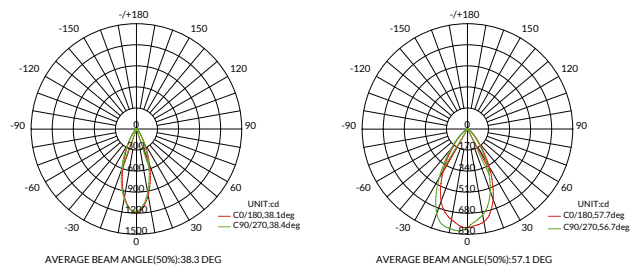

INSTALLATION & ACCESSORIES



Recessed

