

# TLI-CL10401

## DOWNLIGHT

### TECHNICAL

Materials of Optics	PMMA
Materials of Housing	Aluminum Die-casting
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	105lm/W
CRI	≥80/90/97
Beam Angle(°)	36°/60°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White/ Black/ Silver/ Nickel brushed


### FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP65
Power Factor(PF)	≥0.9
Certification	SAA/ RoHS/CE


### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-CL10401A-2.5-5W	5W	AC220-240V	80x80x30	Ø68-72	530lm	0.22	50PCS
TLI-CL10401A-2.5-8W	8W	AC220-240V	80x80x30	Ø68-72	815lm	0.22	50PCS
TLI-CL10401B-2.5-10W	10W	AC220-240V	90x90x39	Ø75-80	1000lm	0.26	50PCS
TLI-CL10401-3-10W	10W	AC220-240V	110x110x50	Ø90-95	1000lm	0.35	30PCS
TLI-CL10401-3-13W	13W	AC220-240V	110x110x50	Ø90-95	1350lm	0.35	30PCS

### OPTICS

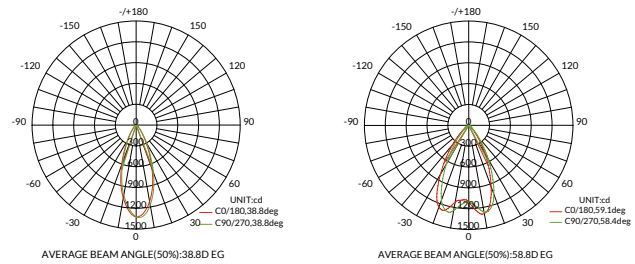

### INSTALLATION & ACCESSORIES



Recessed

