



TLI-CL76B01

DOWNLIGHT

TECHNICAL

Materials of Optics	PC+Tempered Glass
Materials of Housing	Aluminum Die-casting
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	≥90
Beam Angle(°)	15°/24°/ 36°/ 60°
UGR	-
Lifetime(hr)	50,000H
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	DIM TO WARM
Ingress Protection (IP Rating)	IP20/IP54
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE


DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-CL76B01-3-10W	10W	AC200-240V	95x95x55	Ø88	770lm	0.34	48PCS
TLI-CL76B01-20W	20W	AC200-240V	190x95x55	182x85	1850lm	0.50	24PCS

OPTICS

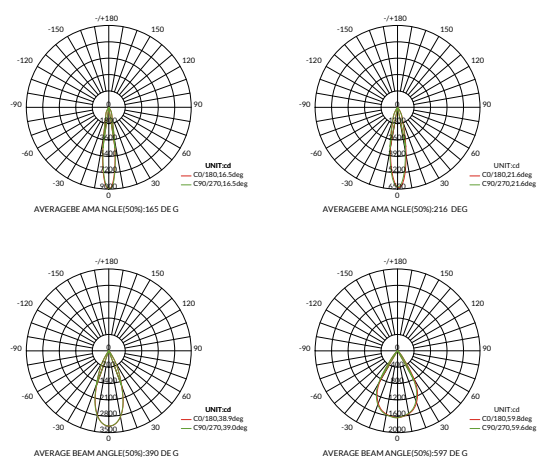

INSTALLATION & ACCESSORIES



Recessed

