

TLI-DL28401A/B

IP65 WATERPROOF COB
DOWNLIGHT

TECHNICAL

Materials of Optics	PC+AL1070+Tempered glass
Materials of Housing	Aluminum Die-casting
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	110lm/W
CRI	≥80
Beam Angle(°)	24°/36°/38°/60°(TLI-DL28401A) 24°/38°/60°(TLI-DL28401B)
UGR	DL28401B
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection	-
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK08(TLI-DL28401B)
Power Factor(PF)	≥0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-DL28401A-3-10W	10W	AC220-240V	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
TLI-DL28401A-3-13W	13W	AC220-240V	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
TLI-DL28401A/B-4-18W	18W	AC220-240V	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	1950lm	0.62/0.72	12PCS
TLI-DL28401A/B-4-25W	25W	AC220-240V	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	2750lm	0.62/0.72	12PCS
TLI-DL28401A/B-6-18W	18W	AC220-240V	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	1950lm	0.79/0.90	12PCS
TLI-DL28401A/B-6-25W	25W	AC220-240V	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	2750lm	0.79/0.90	12PCS
TLI-DL28401A/B-6-30W	30W	AC220-240V	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	3500lm	0.79/0.90	12PCS
TLI-DL28401A/B-8-18W	18W	AC220-240V	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	1950lm	1.27/1.45	6PCS
TLI-DL28401A/B-8-25W	25W	AC220-240V	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	2750lm	1.27/1.45	6PCS
TLI-DL28401A/B-8-35W	35W	AC220-240V	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	3850lm	1.27/1.45	6PCS

OPTICS

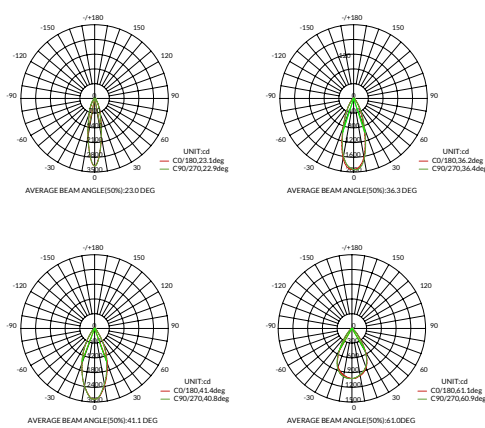

INSTALLATION & ACCESSORIES

