


# TLI-DL28401C

IK10 IP65 SMD DOWNLIGHT

## TECHNICAL

Materials of Optics	PC+AL1070
Materials of Housing	Aluminum Die-casting
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	110lm/W
CRI	≥80
Beam Angle(°)	75°/90°
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


## OPTICS

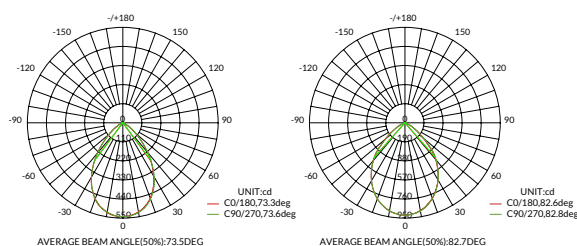

## FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK10
Power Factor(PF)	≥0.9
Certification	SAA/ RoHS/CE

## INSTALLATION & ACCESSORIES

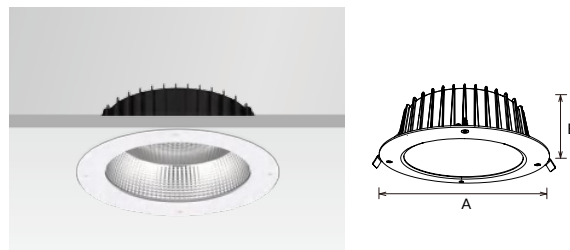

Recessed

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-DL28401C-3-10W	10W	AC220-240V	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
TLI-DL28401C-3-13W	13W	AC220-240V	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
TLI-DL28401C-4-18W	18W	AC220-240V	Ø150x64	Ø125-140	1950lm	0.62	12PCS
TLI-DL28401C-4-25W	25W	AC220-240V	Ø150x64	Ø125-140	2750lm	0.62	12PCS
TLI-DL28401C-6-18W	18W	AC220-240V	Ø172x69	Ø150-165	1950lm	0.79	12PCS
TLI-DL28401C-6-25W	25W	AC220-240V	Ø172x69	Ø150-165	2750lm	0.79	12PCS
TLI-DL28401C-6-30W	30W	AC220-240V	Ø172x69	Ø150-165	3500lm	0.79	12PCS
TLI-DL28401C-8-18W	18W	AC220-240V	Ø235x81	Ø200-220	1950lm	1.27	6PCS
TLI-DL28401C-8-25W	25W	AC220-240V	Ø235x81	Ø200-220	2750lm	1.27	6PCS
TLI-DL28401C-8-35W	35W	AC220-240V	Ø235x81	Ø200-220	3850lm	1.27	6PCS