



TLI-DL297A01

PULL OUT DESIGN
ADJUSTABLE DOWNLIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	≥80/90
Beam Angle(°)	24°/36°
UGR	<19(24°)
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-DL297A01-2.5	10W/15W	AC200-240V	Ø100x114	Ø83-90	900lm/1350lm	0.50	24PCS
TLI-DL297A01-1010	10W/15W	AC200-240V	100x100x114	83-90 83-90	900lm/1350lm	0.50	24PCS
TLI-DL297A01-1018	20W/30W	AC200-240V	180x100x114	85-90 165-170	1800lm/2700lm	0.90	12PCS
TLI-DL297A01-1026	30W/42W/45W	AC200-240V	260x100x114	85-90 245-250	2700lm/3600lm /4050lm	1.50	6PCS

OPTICS

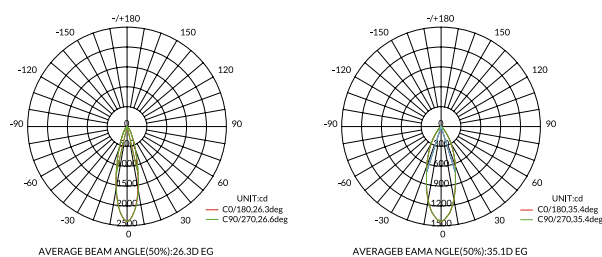

INSTALLATION & ACCESSORIES



Recessed

