

# TLI-DL33501

SCOOP GIMBAL DOWNLIGHT  
LARGER ROTATION ANGLE 90°

## TECHNICAL

|                           |                         |
|---------------------------|-------------------------|
| Materials of Optics       | 2.5"PC 4"/6"/8"Aluminum |
| Materials of Housing      | Aluminum Die-casting    |
| Light Source              | COB (SDCM<3)            |
| Color Temperature         | 3000/4000/5000K         |
| Luminous Efficiency@4000K | 120lm/W                 |
| CRI                       | ≥80                     |
| Beam Angle(°)             | 15°/24°/36°/60°         |
| UGR                       | -                       |
| Lifetime(hr)              | 50,000h                 |
| Product Finishing         | White RAL9016           |


## FEATURES & BENEFITS

|                                |              |
|--------------------------------|--------------|
| CCT Selection                  | 3CCT         |
| LED Driver                     | Built-out    |
| Dimming Option                 | Triac        |
| Ingress Protection (IP Rating) | IP20         |
| Power Factor(PF)               | ≥0.9         |
| Certification                  | SAA/ RoHS/CE |

## DATA SHEET

| CODE                | WATT | INPUT VOLTAGE | DIMENSION(mm) | CUT-OUT(mm) | LUMEN(±5%) | Net(kgs) | Qty/CTN |
|---------------------|------|---------------|---------------|-------------|------------|----------|---------|
| TLI-DL33501-2.5-10W | 10W  | AC220-240V    | Ø96x74        | Ø85-90      | 1100lm     | 0.20     | 36PCS   |
| TLI-DL33501-6-35W   | 35W  | AC220-240V    | Ø180x147      | Ø165-170    | 4050lm     | 1.05     | 12PCS   |
| TLI-DL33501-8-45W   | 45W  | AC220-240V    | Ø235x144      | Ø200-210    | 4900lm     | 1.15     | 12PCS   |

## OPTICS

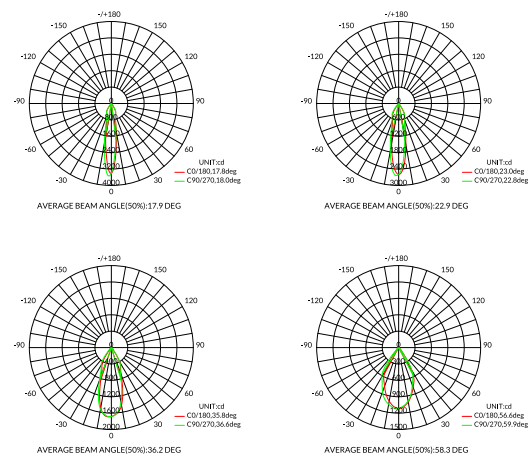

## INSTALLATION & ACCESSORIES



Recessed

