



TLI-DN02SF

SHOP FITTING ADJUSTABLE DOWNLIGHT WITH TRICOLOR & WATTAGE ADJUSTABLE

TECHNICAL

Materials of Optics	-
Materials of Housing	Aluminium
Light Source	Osram
Color Temperature	Tri-color
Luminous Efficiency@4000K	120lm/W
CRI	>85
Beam Angle(°)	90°
UGR	-
Lifetime(hr)	40,000h
Product Finishing	White


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 20
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN02SF-38W	20W/28W /38W	AC200-240V	Ø 195x135	Ø165mm	2298/3385 /4553 lm

EXPERIENCE

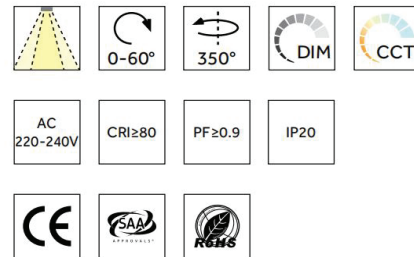

CCT: 3000K 6000K

INSTALLATION & ACCESSORIES

