

TLI-DN11

DOWNLIGHT

TECHNICAL

Materials of Optics	-
Materials of Housing	Aluminium
Light Source	CREE
Color Temperature	3000/4000/5700k
Luminous Efficiency@4000K	90Lm/W
CRI	≥90
Beam Angle(°)	36°
UGR	<19
Lifetime(hr)	40,000h
Product Finishing	White


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 40
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN11-10W-3C	10W	AC200-240V	Ø80x87	Ø75	910lm

EXPERIENCE

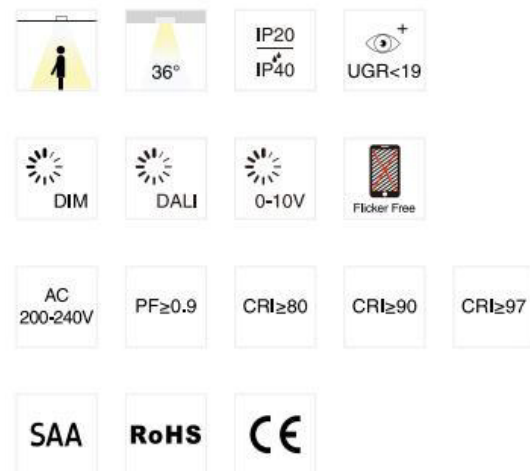

INSTALLATION & ACCESSORIES

