



TLI-DN11B

TRIM-LESS DEEP RECESSED ANTI-GLARING
ADJUSTABLE DOWNLIGHT

TECHNICAL

Materials of Housing	Aluminium
Light Source	CREE/Osram
Color Temperature	3000k Or Tri-color
Luminous Efficiency@4000K	96lm/W
CRI	>90
Beam Angle(°)	45°
UGR	>17
Lifetime(hr)	40,000h
Product Finishing	White/ Black


FEATURES & BENEFITS

CCT Selection	3000K OR 3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN11B-15W-WWW	15W	AC200-240V	Ø98x99	Ø90mm	1200lm

EXPERIENCE

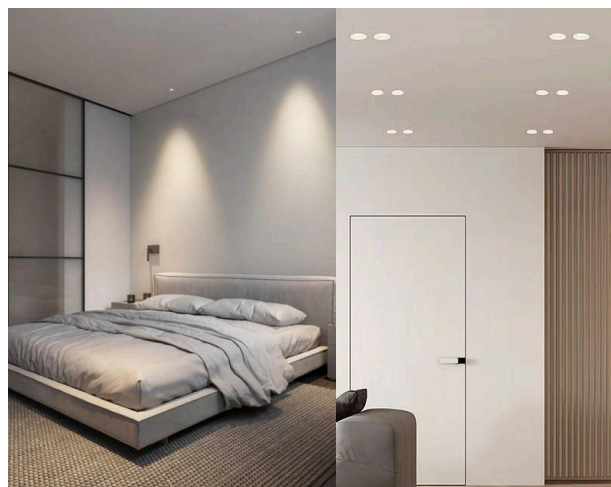

INSTALLATION & ACCESSORIES

