


TLI-DN201

DOWNLIGHT

TECHNICAL

Materials of Housing	Aluminium
Light Source	CREE/Osram
Color Temperature	3000/6500K
Luminous Efficiency@4000K	60lm/W
CRI	>90
Beam Angle(°)	Wall Washer
Lifetime(hr)	40,000h
Product Finishing	White/ Black

EXPERIENCE

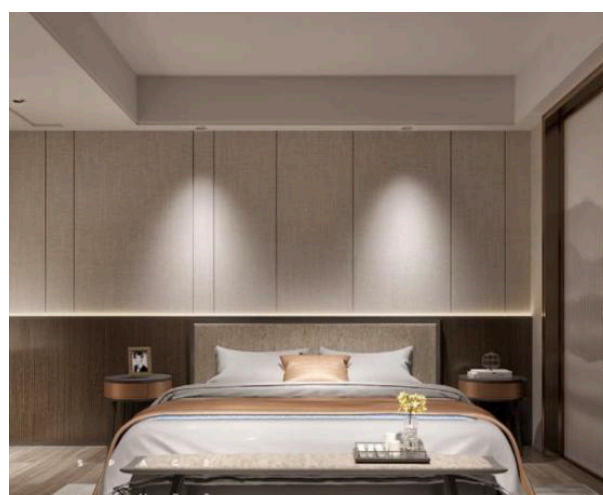

FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 20
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

INSTALLATION & ACCESSORIES



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN201WW-7W	7W	AC100-240V	Ø83x96	Ø75mm	420lm
TLI-DN201WW-10W	10W	AC100-240V	83x111	Ø75mm	600lm
TLI-DN201WW-12W	12W	AC100-240V	83x111	Ø75mm	720lm
TLI-DN201WW-15W	15W	AC100-240V	105x120	Ø95mm	900lm
TLI-DN201WW-18W	18W	AC100-240V	105x120	Ø95mm	1080lm
TLI-DN201WW-20W	20W	AC100-240V	105x120	Ø95mm	1200lm
TLI-DN201WW-25W	25W	AC100-240V	105x130	Ø95mm	1500lm