



# TLI-DN202

## WATERPROOF DOWNLIGHT

### TECHNICAL

Materials of Housing	Aluminium
Light Source	CREE/Osram
Color Temperature	3000K/4000K/6000K
Luminous Efficiency@4000K	100lm/W
CRI	>90
Beam Angle(°)	15°/24°/36°
Lifetime(hr)	40,000hr
Product Finishing	White/ Black


### FEATURES & BENEFITS

CCT Selection	3000K OR 3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP65
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN202-IP65-12W	12W	AC200-240V	Ø104x31	Ø80mm	1075lm

### EXPERIENCE

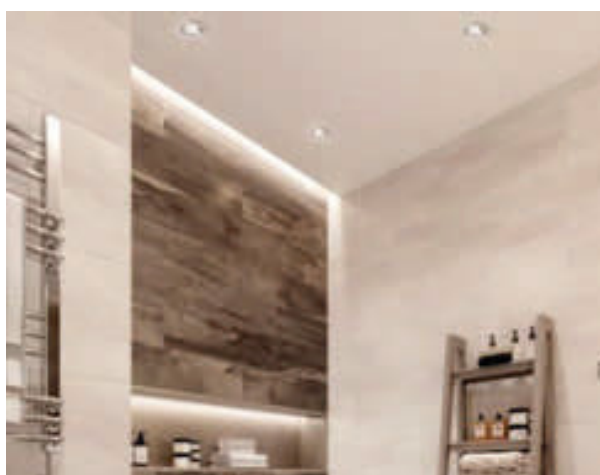

### INSTALLATION & ACCESSORIES

