



# TLI-DN7A

## DOWNLIGHT

### TECHNICAL

|                           |                 |
|---------------------------|-----------------|
| Materials of Housing      | Aluminium       |
| Light Source              | CREE/Osram      |
| Color Temperature         | 3000/4000/5000k |
| Luminous Efficiency@4000K | 128lm/W         |
| CRI                       | >85             |
| Beam Angle(°)             | 24/36/45/60°    |
| Lifetime(hr)              | 40,000h         |
| Product Finishing         | Black           |


### FEATURES & BENEFITS

|                                |                    |
|--------------------------------|--------------------|
| CCT Selection                  | 3CCT               |
| LED Driver                     | Built-out          |
| Dimming Option                 | Triac/ DALI/ 0-10V |
| Ingress Protection (IP Rating) | IP 20/IP 54        |
| Power Factor(PF)               | ≥0.9               |
| Certification                  | SAA/RoHS/CE/CB     |

### DATA SHEET

| CODE            | WATT | INPUT VOLTAGE | DIMENSION(mm) | LUMEN(±5%) |
|-----------------|------|---------------|---------------|------------|
| TLI-DN7A-03-13W | 13W  | AC200-240V    | Ø90x100       | 1100lm     |
| TLI-DN7A-04-18W | 18W  | AC200-240V    | Ø120x130      | 2300lm     |
| TLI-DN7A-06-25W | 25W  | AC200-240V    | Ø160x170      | 3200lm     |
| TLI-DN7A-08-35W | 35W  | AC200-240V    | Ø200x210      | 3955lm     |
| TLI-DN7A-08-45W | 45W  | AC200-240V    | Ø200x210      | 4770lm     |

### EXPERIENCE

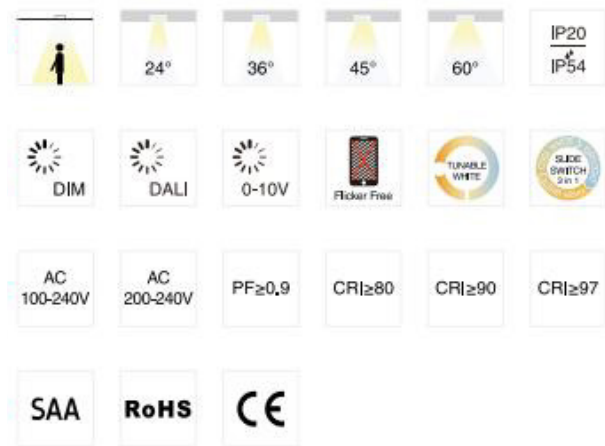

### INSTALLATION & ACCESSORIES

