

TLI-DN8A

DOWNLIGHT

TECHNICAL

Materials of Optics	PC Diffuser
Materials of Housing	Aluminium
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5700K
Luminous Efficiency@4000K	110lm/W
CRI	≥85
Beam Angle(°)	90°
Lifetime(hr)	50,000h
Product Finishing	Silver/White/ Black


FEATURES & BENEFITS

CCT Selection	WWW/3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 44
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN8A-2.5-12W	12W	AC200-240V	Ø85x39.5	Ø70-75	730lm
TLI-DN8A-2-18W	18W	AC200-240V	Ø170x45	Ø140-150	1550lm
TLI-DN8A-6-25W	25W	AC200-240V	Ø190x45	Ø160-170	2130lm
TLI-DN8A-8-35W	35W	AC200-240V	Ø228x45	Ø200-210	2790lm

OPTICS

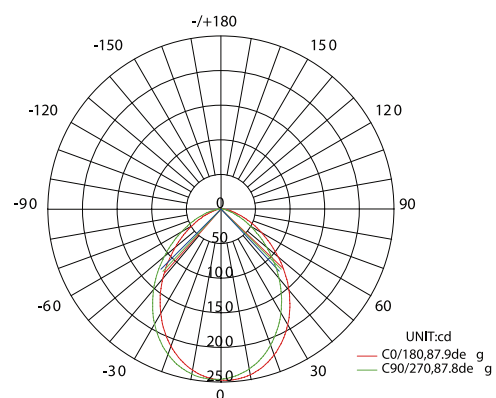

AVERAGE BEAM ANGLE(50%):87.9 DEG

INSTALLATION & ACCESSORIES

