



Downlight **Angel: 19A**

Introduction

- TLI SMD LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output.
- Triac dimmable, 0-10V dimmable and DALI dimmable version available
- V0 fire rated plastic housing with internal driver design, it is our most economical and practical downlight version.
- Application: Suitable for commercial and residential applications like offices, supermarkets, shops, schools, hotels, restaurants, workshop, warehouse, homes etc.

Appearance Parameters

Model	Dimension (mm)			Product Size (mm)	Cut out (mm)	Net Weight
	A	B	C			
TLI-DN19A-12W	Ø115	Ø87	58	Ø115x58	Ø90-100	0.25

Technical Specifications

Voltage: AC100-240V / AC200-240V

Power: 12W

Power Factor: ≥0.9

Beam angle: 90°

CCT: 3000K 4000K 5000K 5700K


Lifespan: 40000hrs

CRI: ≥80

IP: 20

Dimmable: Triac dimmable

Surface color: White

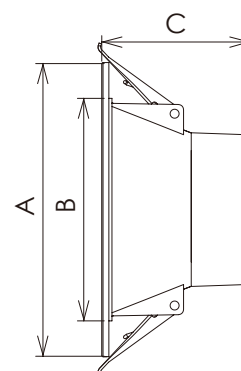

Model	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
	3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K