


TLI-TR88B

ADJUSTABLE SURFACE MOUNTED

TECHNICAL

Materials of Optics	PMMA
Materials of Housing	PC/ Aluminum
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5700K
Luminous Efficiency@4000K	105lm/W
CRI	≥80/90/97(1-CCT) ≥90(3CCT)
Beam Angle(°)	36(24°/30°/36°/45°/60°)
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


OPTICS

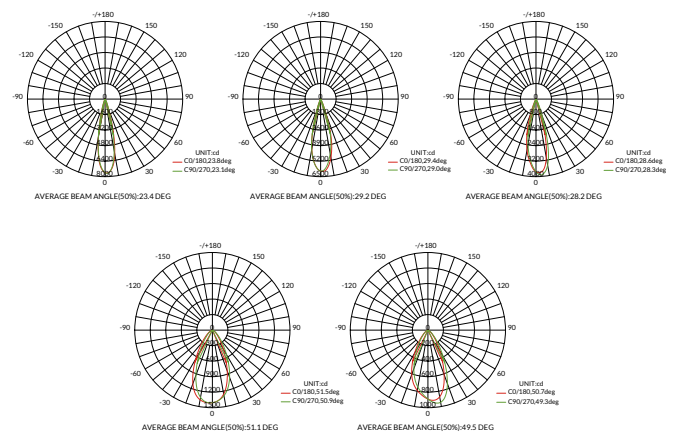


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac/ DALI
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

INSTALLATION & ACCESSORIES

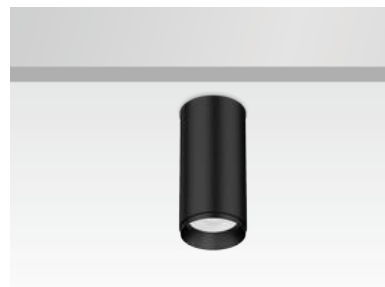

Surface mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-TR88B-10W-C3	10W	AC200-240V	Ø55x218	1100lm	0.55	12PCS