


MODULE

DOWNLIGHT




TLI-TH0001


RIM COVER EXCHANGEABLE
MODULAR DESIGN

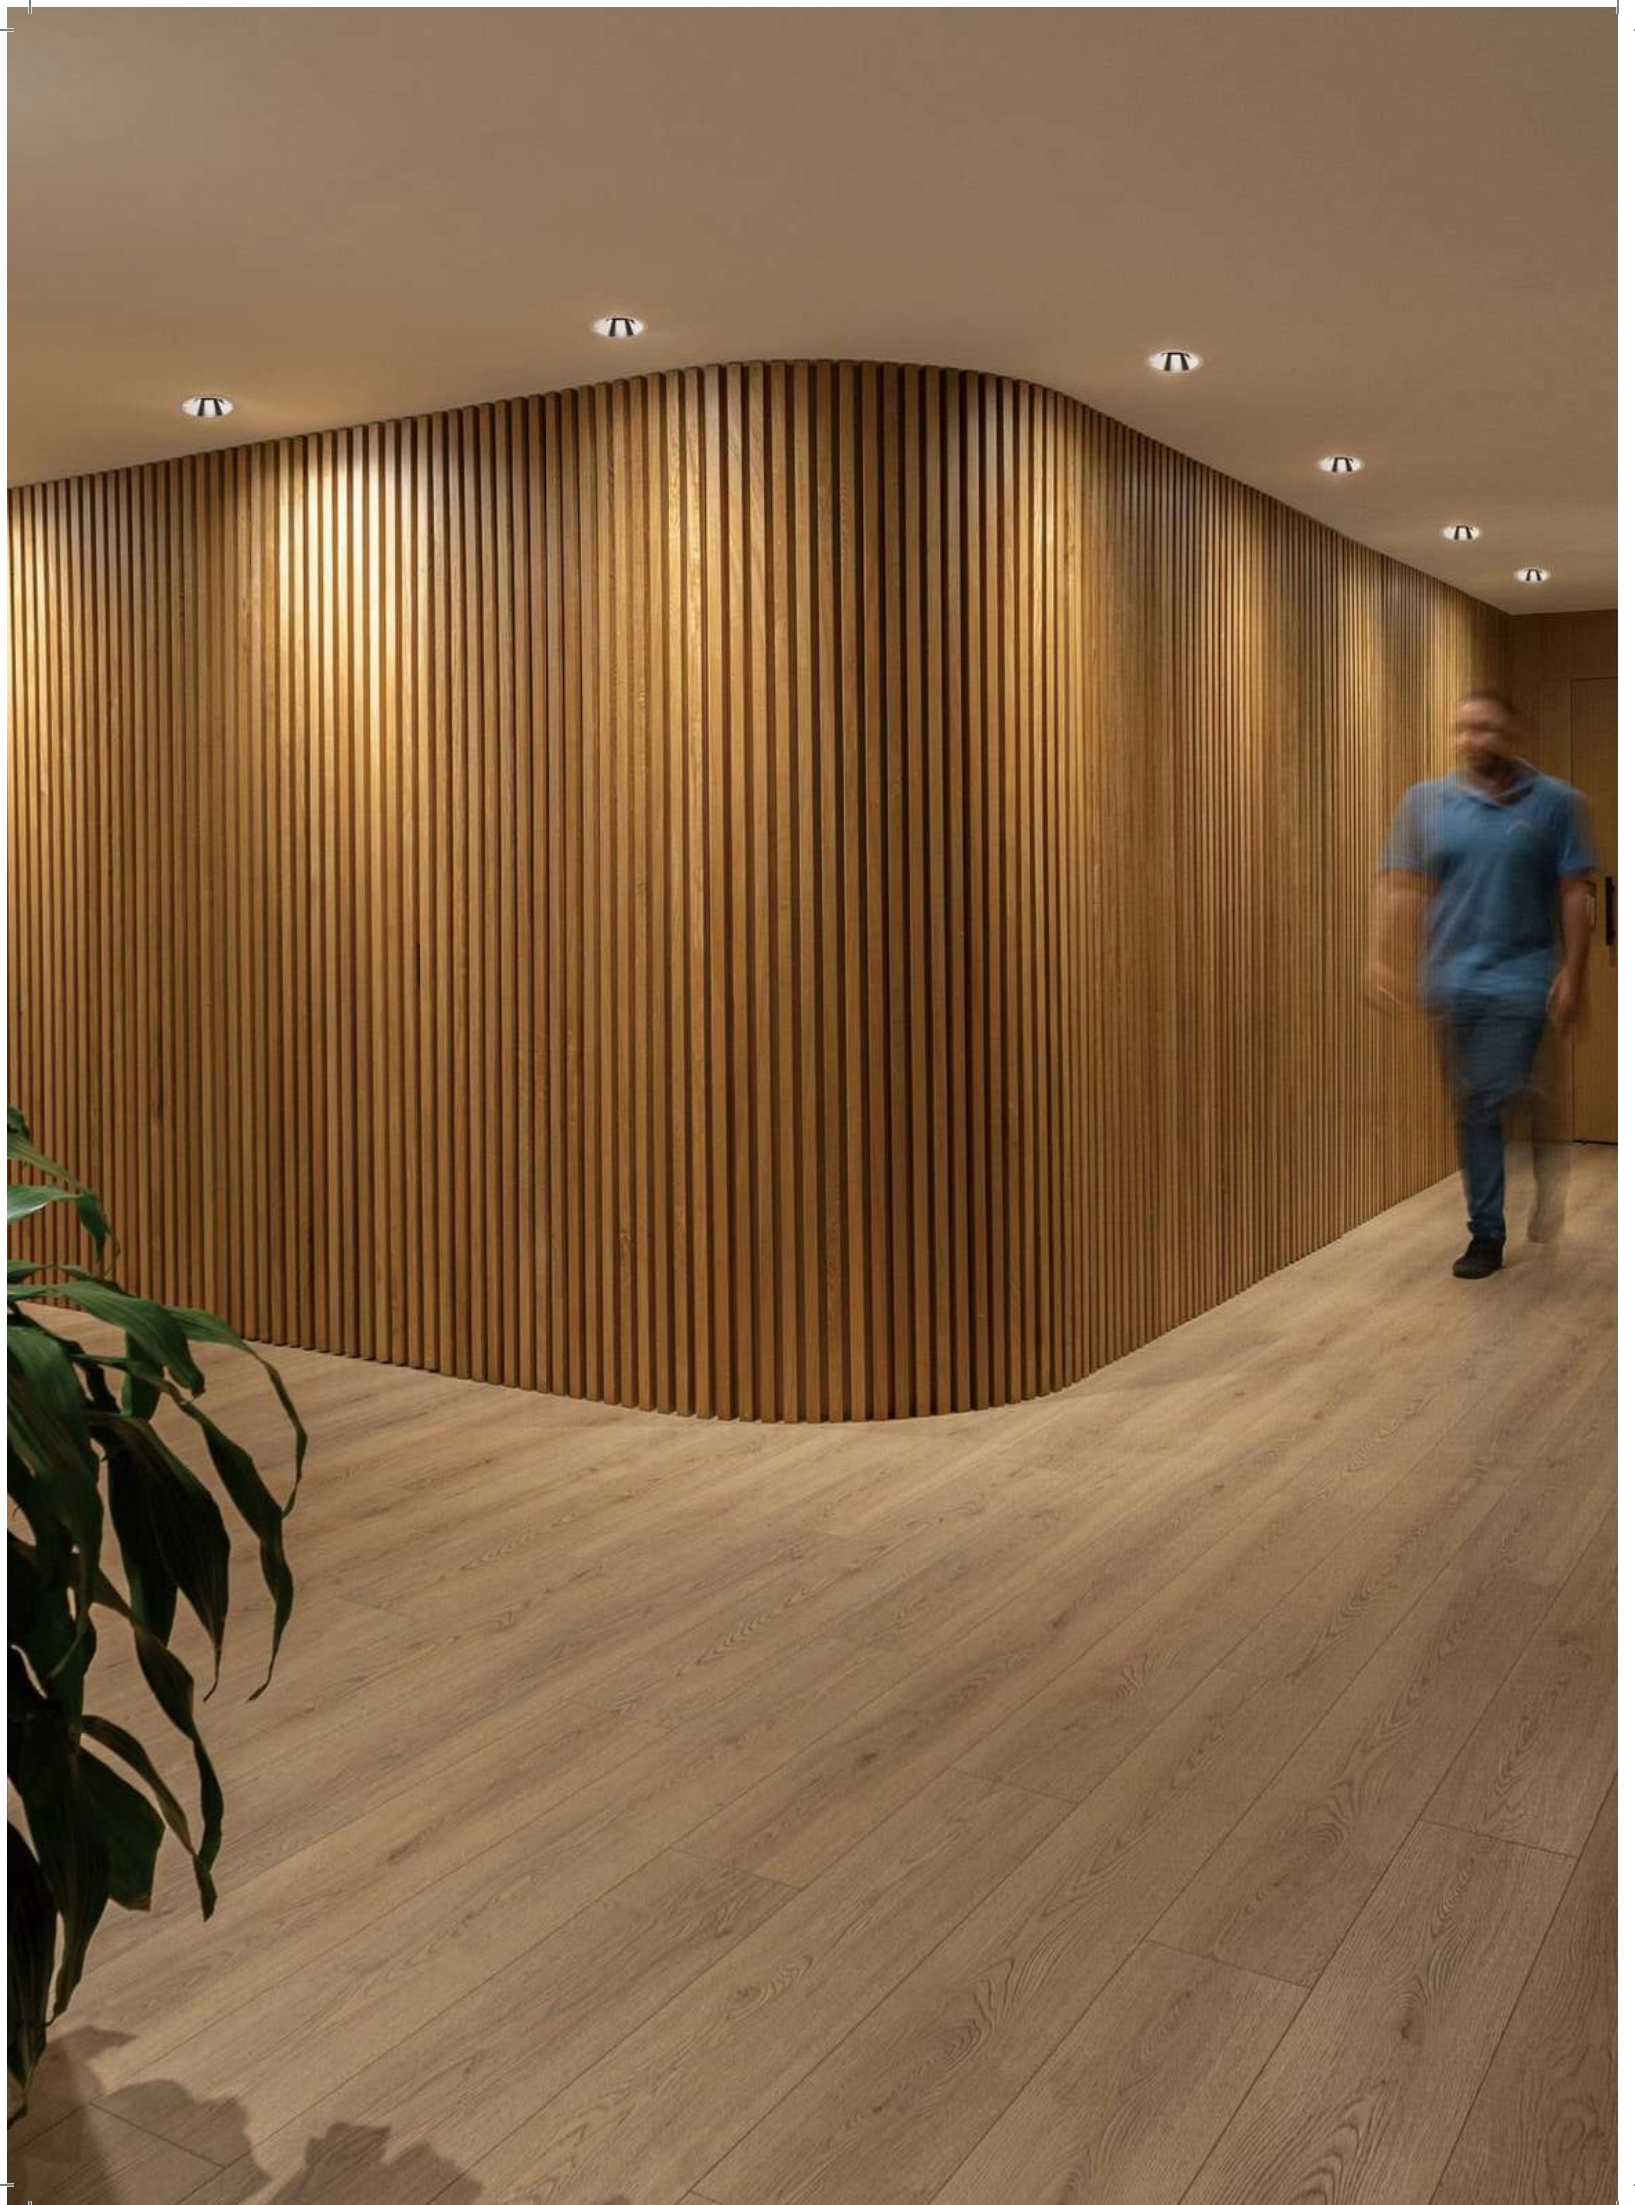


TH0001A/B

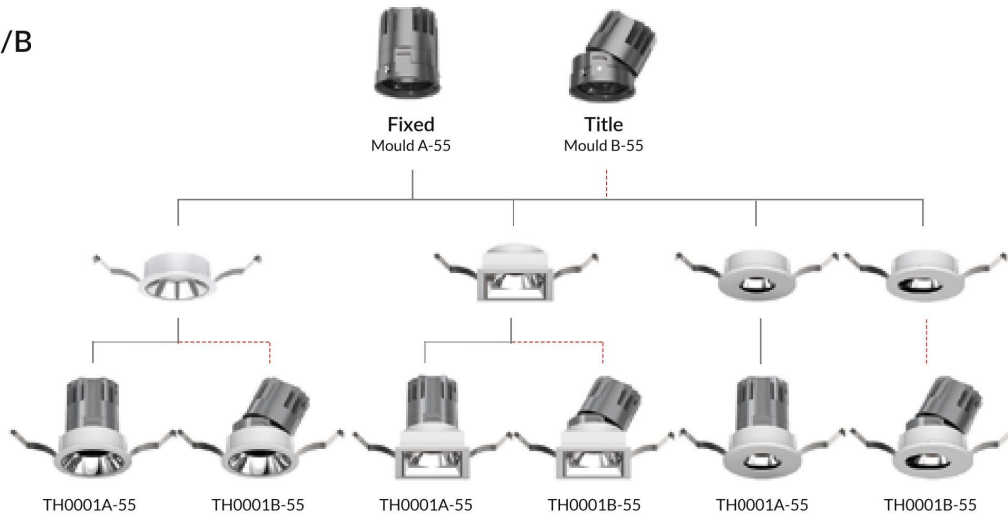


TH0001A/B  Ø75mm

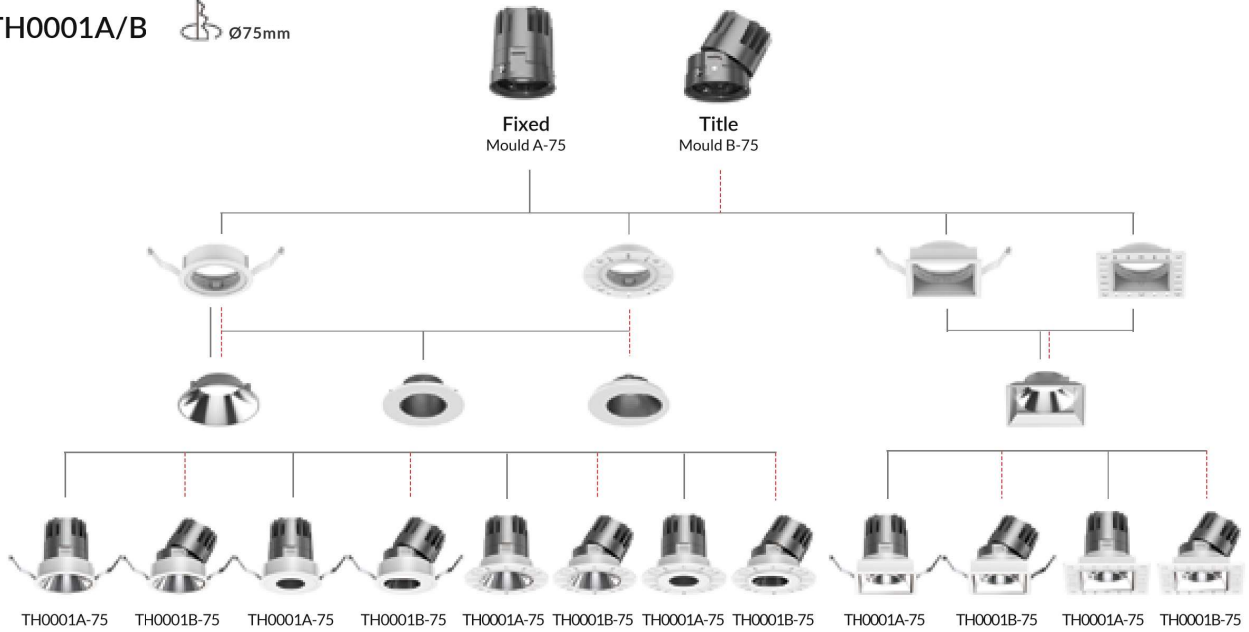


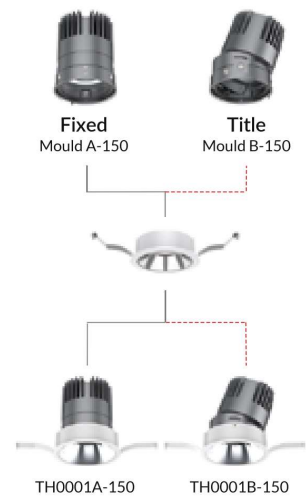
TH0001C/D  Ø75mm

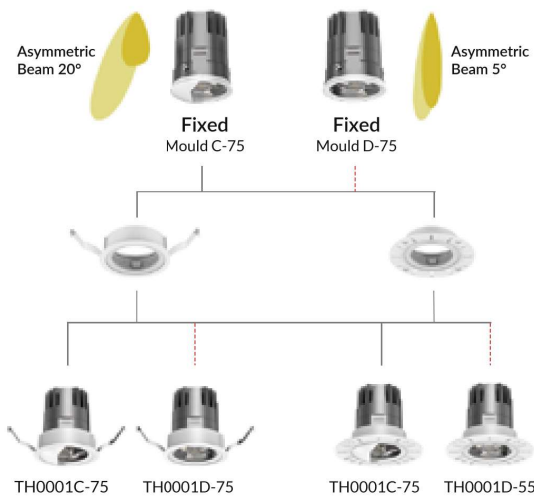

TH0001A/B  Ø105mm

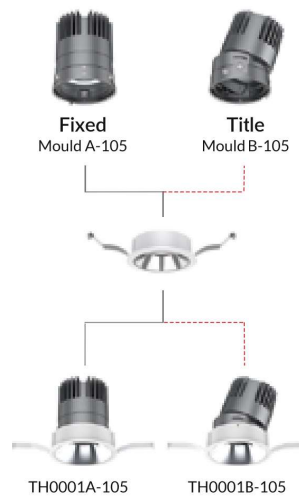

 Ø150mm






DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-TH0001A-55-4.5W	4.5W	AC220-240V	Ø62x67	Ø55-57	350lm	0.19	24PCS
TLI-TH0001A-55-4.5W	4.5W	AC220-240V	62x62x73	Ø55-57	350lm	0.19	24PCS
TLI-TH0001A-55-4.5W	4.5W	AC220-240V	Ø64x68	Ø75-77	350lm	0.19	24PCS
TLI-TH0001A-55-8W	8W	AC220-240V	Ø62x67	Ø75-77	550lm	0.19	24PCS
TLI-TH0001A-55-8W	8W	AC220-240V	62x62x73	Ø75-77	550lm	0.19	24PCS
TLI-TH0001A-55-8W	8W	AC220-240V	Ø64x68	Ø75-77	550lm	0.19	24PCS
TLI-TH0001B-55-4.5W	4.5W	AC220-240V	Ø62x67	Ø105-107	350lm	0.19	24PCS
TLI-TH0001B-55-4.5W	4.5W	AC220-240V	62x62x73	Ø105-107	350lm	0.19	24PCS
TLI-TH0001B-55-4.5W	4.5W	AC220-240V	Ø62x67	Ø105-107	350lm	0.19	24PCS
TLI-TH0001B-55-8W	8W	AC220-240V	Ø62x67	Ø105-107	550lm	0.19	24PCS
TLI-TH0001B-55-8W	8W	AC220-240V	62x62x73	Ø150-152	550lm	0.19	24PCS
TLI-TH0001B-55-8W	8W	AC220-240V	Ø62x67	Ø150-152	550lm	0.19	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	Ø82x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	Ø110x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	83x83x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	110x110x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	Ø82x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-7.5W	7.5W	AC220-240V	Ø110x85	Ø75-77	650lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	Ø82x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	Ø110x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	83x83x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	110x110x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	Ø82x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-10W	10W	AC220-240V	Ø110x85	Ø75-77	800lm	0.29	24PCS
TLI-TH0001A/B-75-12W	12W	AC220-240V	Ø82x85	Ø75-77	950lm	0.29	24PCS
TLI-TH0001A/B-75-12W	12W	AC220-240V	Ø110x85	Ø75-77	950lm	0.29	24PCS
TLI-TH0001A/B-75-12W	12W	AC220-240V	83x83x85	Ø75-77	950lm	0.29	24PCS
TLI-TH0001A/B-75-12W	12W	AC220-240V	110x110x85	Ø75-77	950lm	0.29	24PCS

TECHNICAL

Materials of Optics	PMMA/ PC
Materials of Housing	Aluminium Die-casting
Light Source	COB (SDCM<3)
Color Temperature	3000/4000K/6000K
Luminous Efficiency@4000K	100lm/W
CRI	≥90
Beam Angle(°)	15°/20°/24°/36°/45°/50°/ 55°x36°x20°/22°x24°x5°
UGR	<19
Lifetime(hr)	50,000h
Product Finishing	Grey RAL9007


OPTICS

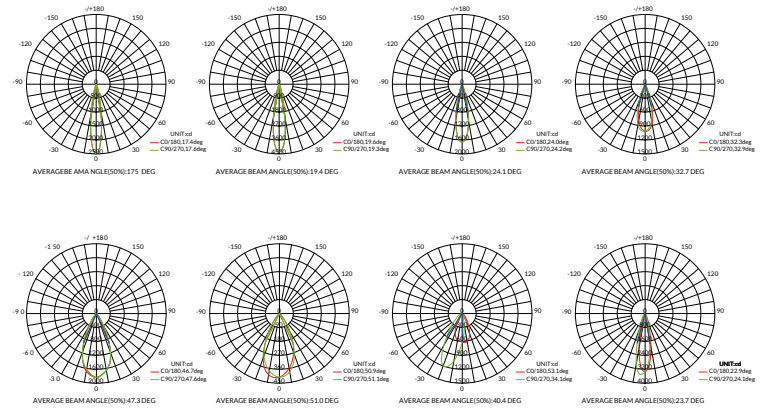

FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac
Functions	-
Ingress Protection (IP Rating)	IP20/IP44
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/CE

INSTALLATION & ACCESSORIES



CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-TH0001A/B-75-12W	12W	AC220-240V	Ø82x85	Ø75-77	950lm	0.29	24PCS
TLI-TH0001A/B-75-12W	12W	AC220-240V	Ø110x85	Ø75-77	950lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	Ø82x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	Ø110x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	83x83x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	110x110x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	Ø82x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001A/B-75-15W	15W	AC220-240V	Ø110x85	Ø75-77	1100lm	0.29	24PCS
TLI-TH0001C-75-10W	10W	AC220-240V	Ø82x94	Ø75-77	850lm	0.37	24PCS
TLI-TH0001C-75-10W	10W	AC220-240V	Ø110x94	Ø75-77	850lm	0.37	24PCS
TLI-TH0001C-75-14W	14W	AC220-240V	Ø82x94	Ø75-77	1200lm	0.37	24PCS
TLI-TH0001C-75-14W	14W	AC220-240V	Ø110x94	Ø75-77	1200lm	0.37	24PCS
TLI-TH0001D-75-10W	10W	AC220-240V	Ø82x94	Ø75-77	1000lm	0.37	24PCS
TLI-TH0001D-75-10W	10W	AC220-240V	Ø110x94	Ø75-77	1000lm	0.37	24PCS
TLI-TH0001D-75-14W	14W	AC220-240V	Ø82x94	Ø75-77	1450lm	0.37	24PCS
TLI-TH0001D-75-14W	14W	AC220-240V	Ø110x94	Ø75-77	1450lm	0.37	24PCS
TLI-TH0001A/B-105-14W	14W	AC220-240V	Ø114x120	Ø105-107	1250lm	0.70	12PCS
TLI-TH0001A/B-105-14W	14W	AC220-240V	Ø114x120	Ø105-107	1750lm	0.70	12PCS
TLI-TH0001A/B-105-14W	14W	AC220-240V	Ø114x120	Ø105-107	2100lm	0.70	12PCS
TLI-TH0001A/B-105-14W	14W	AC220-240V	Ø114x120	Ø105-107	2400lm	0.70	12PCS
TLI-TH0001A/B-150-30W	30W	AC220-240V	Ø154x174	Ø150-152	3100lm	1.75	6PCS
TLI-TH0001A/B-150-30W	30W	AC220-240V	Ø154x174	Ø150-152	3500lm	1.75	6PCS
TLI-TH0001A/B-150-30W	30W	AC220-240V	Ø154x174	Ø150-152	3900lm	1.75	6PCS
TLI-TH0001A/B-150-30W	30W	AC220-240V	Ø154x174	Ø150-152	4300lm	1.75	6PCS