

TLI-DN99-SP

NON-MAINTAINED EMERGENCY
SPITFIRE

TECHNICAL

Mains Supply	220-240VAC ,50/60Hz
Battery Size & Type	LiFePO4 3.2V1.5Ah
Product Finishing	White/Black
Luminous Flux	185 lm (emergency)
CRI	70
Beam Angle(°)	142°
Duration Time	3h
Recharge Period	16h



FEATURES & BENEFITS

Protection Class	Class II
View Distance	24 m
Operating Temperature	0-40 °C
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	MAINS SUPPLY	DIMENSIONS(mm)	CUT OUT
TLI-DN99-SP	2 W	220-240VAC ,50/60Hz	145x27	Ø76-130 mm
TLI-DN99-SP-BK	2 W	220-240VAC ,50/60Hz	145x27	Ø76-130 mm
Accessories				
TLI-DN99-SP-KIT	IP65	IK 10		85 mm

OPTICS

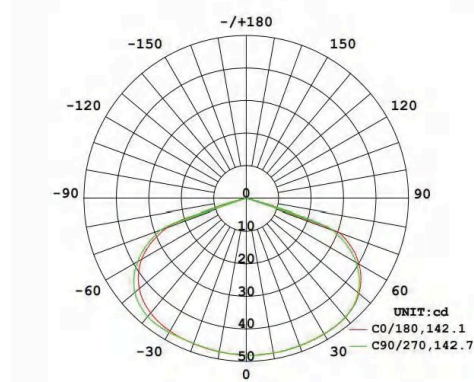

INSTALLATION & ACCESSORIES

