


TLI-WL108

DECORATIVE WALL LIGHT WITH
INDIRECT LIGHTING

TECHNICAL

Materials of Housing	Aluminium
Color Temperature	3000/4000/6000k
Luminous Efficiency@4000K	100Lm/W
CRI	>85
Beam Angle(°)	In-directional
Lifetime(hr)	40,000h
Product Finishing	Black/Pink/White/Nickle/Gold


OPTICS

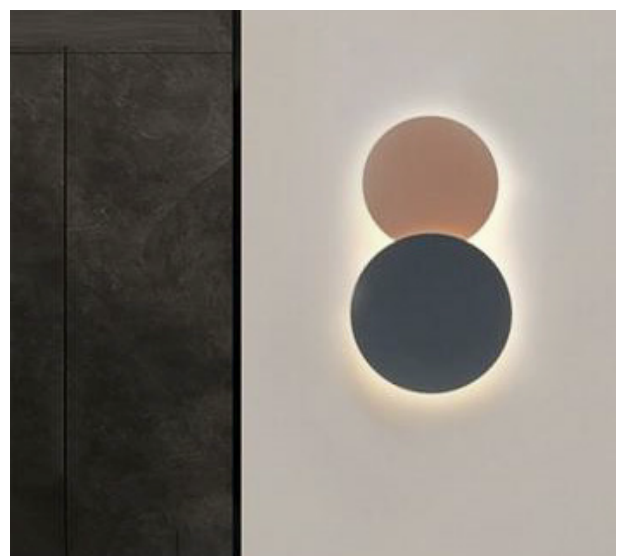

FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Triac/ DALI
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DIMENSION

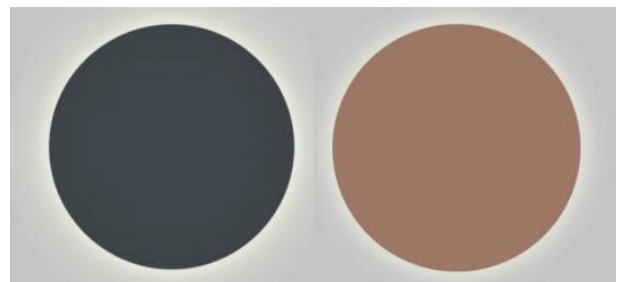

Φ200/250/300/400mm

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	COLOR
TLI-WL108-200	12W	AC220V/50HZ	Ø300x50mm (each)	Black/Pink/White/Brush/Nickle/Gold
TLI-WL108-250	15W	AC220V/50HZ	Ø400x50mm (each)	Black/Pink/White/Brush/Nickle/Gold
TLI-WL108-300	18W	AC220V/50HZ	Ø300x50mm (each)	Black/Pink/White/Brush/Nickle/Gold
TLI-WL108-400	18W	AC220V/50HZ	Ø400x50mm (each)	Black/Pink/White/Brush/Nickle/Gold