





# TLI-FL10-CW

TLI FLOOD LIGHT WITH 1.2M CORDS WITH SAA PLUG

## TECHNICAL

|                           |             |
|---------------------------|-------------|
| Materials of Housing      | Aluminium   |
| Color Temperature         | 5000k       |
| Luminous Efficiency@4000K | 110-140lm/W |
| CRI                       | >80         |
| Beam Angle(°)             | 120°        |
| Lifetime(hr)              | 40,000h     |
| Product Finishing         | Black       |

## OPTICS

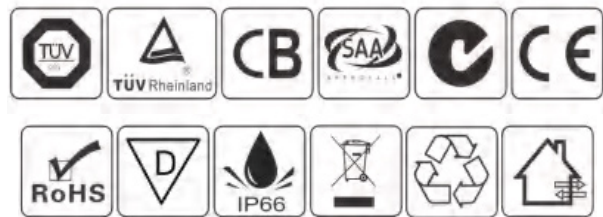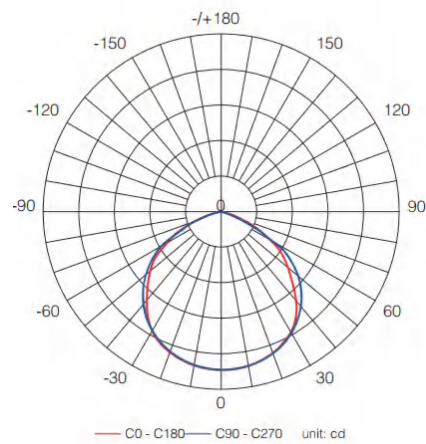

## FEATURES & BENEFITS

|                                |                    |
|--------------------------------|--------------------|
| LED Driver                     | Built-in           |
| Dimming Option                 | Triac/ DALI/ 0-10V |
| Ingress Protection (IP Rating) | IP 66              |
| Power Factor (PF)              | ≥0.9               |
| Certification                  | SAA/RoHS/CE/CB     |

## INSTALLATION & ACCESSORIES



## DATA SHEET

| CODE             | WATT | INPUT VOLTAGE | DIMENSION(mm) | LUMEN(±5%) |
|------------------|------|---------------|---------------|------------|
| TLI-FL10-30W- CW | 30W  | AC200-277V    | 159x120x31mm  | 3000lm     |
| TLI-FL10-50W-CW  | 50W  | AC200-277V    | 205x160x33mm  | 5000lm     |
| TLI-FL10-100W-CW | 100W | AC200-277V    | 269x210x35mm  | 10000lm    |
| TLI-FL10-150W-CW | 150W | AC200-277V    | 380x280x45mm  | 15000lm    |
| TLI-FL10-200W-CW | 200W | AC200-277V    | 445x392x56mm  | 24000lm    |
| TLI-FL10-300W-CW | 300W | AC200-277V    |               | 42000lm    |