


Non-dimmable power supply, Constant voltage or constant current



TLI-PS09-V24-65

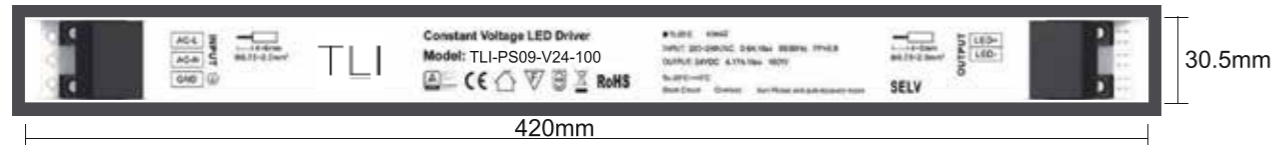


TLI-PS09-V24-100

3-in-1 dimmable power supply, Constant voltage or constant current



TLI-PS09-V24-25D

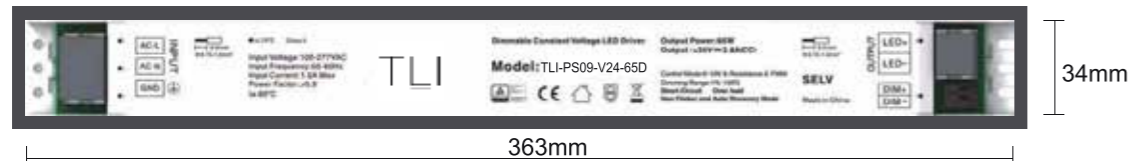

TLI-PS09-V24-65D



TLI-PS09-V24-100D



Non-dimmable power supply



TLI-PS09-V24-65



TLI-PS09-V24-100

Voltage input	200~240VAC 50/60Hz	200~240VAC 50/60Hz
Current input	0.4A Max	0.6A Max
Voltage output	24VDC	24VDC
Current output	2.7A Max	4.17A Max
Power	65W	100W
Power factor	>0.95	>0.95
Efficiency	90%	90%
Size	400×24.5×22mm	420×30.5×26mm

3-in-1 dimming power supply



TLI-PS09-V24-25D



TLI-PS09-V24-65D



TLI-PS09-V24-100D

Voltage input	100~277VAC 50/60Hz	100~277VAC 50/60Hz	100~277VAC 50/60Hz
Current input	0.35A Max	1.0A Max	1.6A Max
Voltage output	24VDC	24VDC	24VDC
Current output	1.05A Max	2.8A Max	4.1A Max
Power	25W	65W	100W
Power factor	>0.95	>0.95	>0.95
Efficiency	85%	90%	92%
Size	330*21*20mm	363*34*22.5mm	390*38*28.5mm