


LINEAR LIGHT



DIY LED module
for upwards



Pluggable and magnetic
seamless splicing



Convert DB146A to B



High lumen 110lm/W
and 130lm/W for option

TLI-PL10534

ULTRA-THIN
OFFICE LINEAR LIGHTING

TECHNICAL

Materials of Optics	PMMA/ PMMA+PC (TLI-PL10534A/B) PC (TLI-PL10534C)/ PMMA+PC (TLI-PL10534D)
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	65-130lm/W
CRI	≥80
Beam Angle(°)	80°/Up110° Down 80° (PL10534A) 60°/Up110° Down 60° (PL10534B) 36°/Up110° Down 36° (PL10534C)36° +80°/Up110° Down 36°+80° (PL10534D)
UGR	<22(PL10534B)/<19(PL10534C)
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005

FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT (PL10534A/B)
LED Driver	Built-in
Dimming Option	DALI
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	RoHS/CE


DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL10534A-600-18W	15W	AC220-240V	605x34x105	1650lm	1.40	6PCS
TLI-PL10534A-600-18W	15W+3W	AC220-240V	605x34x105	2000lm	1.40	6PCS
TLI-PL10534A-900-25W	20W	AC220-240V	905x34x105	2200lm	2.10	6PCS
TLI-PL10534A-900-25W	20W+5W	AC220-240V	905x34x105	2700lm	2.10	6PCS
TLI-PL10534A-1200-38W	30W	AC220-240V	1205x34x105	4000lm	2.70	6PCS
TLI-PL10534A-1200-38W	30W+8W	AC220-240V	1205x34x105	4900lm	2.70	6PCS
TLI-PL10534A-1500-50W	40W	AC220-240V	1505x34x105	5200lm	3.20	6PCS
TLI-PL10534A-1500-50W	40W+10W	AC220-240V	1505x34x105	6400lm	3.20	6PCS
TLI-PL10534B-1200-38W	30W	AC220-240V	1205x34x105	1800lm	2.70	6PCS
TLI-PL10534B-1200-38W	30W+8W	AC220-240V	1205x34x105	2850lm	2.70	6PCS
TLI-PL10534B-1500-50W	40W	AC220-240V	1505x34x105	2400lm	3.20	6PCS
TLI-PL10534B-1500-50W	40W+10W	AC220-240V	1505x34x105	3700lm	3.20	6PCS
TLI-PL10534C-1200-38W	30W	AC220-240V	1205x34x105	4000lm	2.70	6PCS
TLI-PL10534C-1200-38W	30W+8W	AC220-240V	1205x34x105	4900lm	2.70	6PCS
TLI-PL10534C-1500-50W	40W	AC220-240V	1505x34x105	5200lm	3.20	6PCS
TLI-PL10534C-1500-50W	40W+10W	AC220-240V	1505x34x105	6400lm	3.20	6PCS
TLI-PL10534D-1200-38W	30W	AC220-240V	1205x34x105	4000lm	2.70	6PCS
TLI-PL10534D-1200-38W	30W+8W	AC220-240V	1205x34x105	4900lm	2.70	6PCS
TLI-PL10534D-1500-50W	40W	AC220-240V	1505x34x105	5200lm	3.20	6PCS
TLI-PL10534D-1500-50W	40W+10W	AC220-240V	1505x34x105	6400lm	3.20	6PCS

TLI-PL10534

ULTRA-THIN OFFICE LINEAR LIGHTING

OPTICS

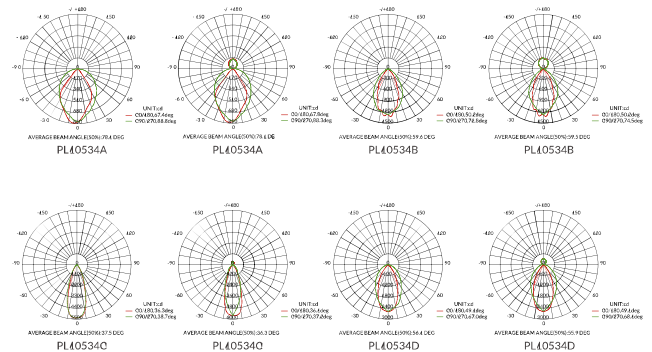

INSTALLATION & ACCESSORIES

