

| PL6229RC-WALL WASHER

Symmetric beam 60°
Asymmetric beam 36°*20°
(20° Polarization)

| PL6229RB-STAINLOUVER

Silver reflector 60°
White reflector 80°

| PL6229RA

Opal diffuser 110°
prismatic diffuser 90°

TLI-PL6229R | RECESSED LINEAR LIGHT
SYSTEM

TLI-PL6229R

RECESSED LINEAR LIGHT SYSTEM

TECHNICAL

Materials of Optics	PC (TLI-PL6229RA/B) PMMA (TLI-PL6229RC)
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	110lm/W(TLI-PL6229RA) 105lm/W(TLI-PL6229RB/C)
CRI	≥80
Beam Angle(°)	110°(TLI-PL6229RA) 60°/80°(TLI-PL6229RB) 60°/36x20°(TLI-PL6229RC)
UGR	<19(TLI-PL6229RB)
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	DALI
Ingress Protection (IP Rating)	IP40
Power Factor (PF)	≥0.9
Certification	RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL6229RA/B-600-15W	15W	AC220-240V	615x62x29	607x54	1600lm	0.67/0.71	12PCS
TLI-PL6229RA/B-1200-30W	30W	AC220-240V	1208x62x29	1201x54	3400lm/3200lm	1.21/1.26	6PCS
TLI-PL6229RA/B-1500-37W	37W	AC220-240V	1505x62x29	1498x54	4200lm	1.48/1.54	6PCS
TLI-PL6229RA/B-1800-45W	45W	AC220-240V	1802x62x29	1794x54	5000lm	1.78/1.85	6PCS
TLI-PL6229RA/B-2400-60W	60W	AC220-240V	2395x62x29	2388x54	6600lm/6200lm	2.27/2.36	6PCS
TLI-PL6229RC-600-15W	15W	AC220-240V	615x62x29	607x54	1450lm	0.75	12PCS
TLI-PL6229RC-1200-30W	30W	AC220-240V	1208x62x29	1201x54	3300lm	1.37	6PCS
TLI-PL6229RC-1500-37W	37W	AC220-240V	1505x62x29	1498x54	3900lm	1.69	6PCS
TLI-PL6229RC-1800-45W	45W	AC220-240V	1802x62x29	1794x54	4800lm	2.02	6PCS
TLI-PL6229RC-2400-60W	60W	AC220-240V	2395x62x29	2388x54	6400lm	2.62	6PCS

OPTICS

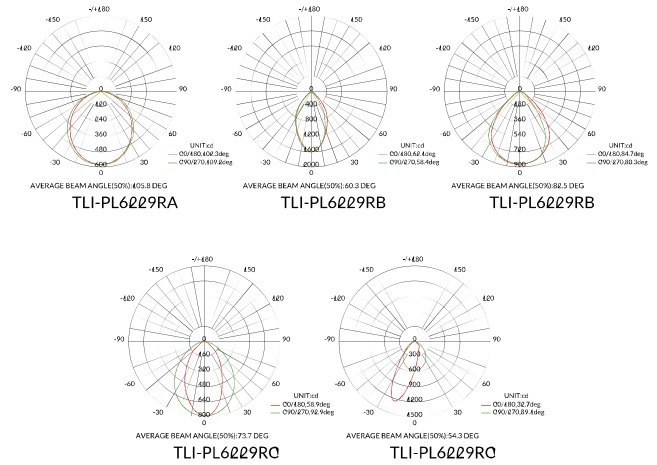

INSTALLATION & ACCESSORIES

