



# TLI-PL7657A

DIFFUSER TYPE

## TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	100lm/W(Standard cover) 90lm/W(Prismatic cover)
CRI	≥80
Beam Angle(°)	Down 110°/UP 110°& Down 110° (Standard cover) Down 75°/UP 110°& Down 75° (Prismatic cover)
UGR	-(Standard opal cover) <19/<22((Prismatic cover))
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


## FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	DALI/ 0-10V
Functions	Sensor
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	RoHS/CE

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL7657A-600-17W	17W	AC220-240V	602x57x76	1680lm	1.70	6PCS
TLI-PL7657A-600-22W(Up& Down)	17W+5W	AC220-240V	602x57x76	2250lm	1.70	6PCS
TLI-PL7657A-1200-36W	36W	AC220-240V	1212x57x76	3850lm	2.70	6PCS
TLI-PL7657A-1200-45W(Up& Down)	36W+9W	AC220-240V	1212x57x76	4850lm	2.70	6PCS
TLI-PL7657A-1500-45W	45W	AC220-240V	1512x57x76	4850lm	3.50	6PCS
TLI-PL7657A-1500-56W(Up& Down)	45W+11W	AC220-240V	1512x57x76	6000lm	3.50	6PCS

## OPTICS

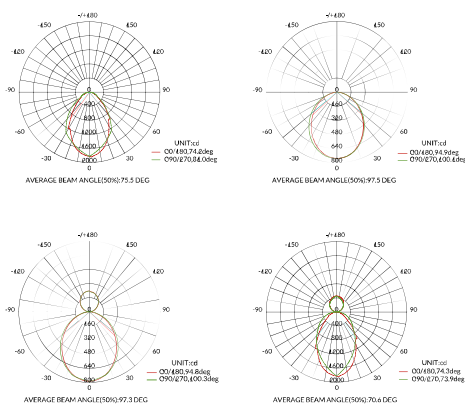

## INSTALLATION & ACCESSORIES

