

TLI-PL7657B

GRILL REFLECTOR
UGR<19

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	100lm/W
CRI	≥80
Beam Angle(°)	65°/UP 110°& Down 110°
UGR	<19
Lifetime(hr)	50,000h
Product Finishing	White RAL9016


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	DALI/ 0-10V
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	RoHS/CE


DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL7657B-1200-36W	36W	AC220-240V	Ø1212x57x76	3650lm	2.30	6PCS
TLI-PL7657B-1200-48W(Up&Down)	48W	AC220-240V	Ø1212x57x76	4800lm	2.30	6PCS
TLI-PL7657B-1500-45W	45W	AC220-240V	Ø1512x57x76	4550lm	2.80	6PCS
TLI-PL7657B-1500-60W(Up&Down)	60W	AC220-240V	Ø1512x57x76	6000lm	2.80	6PCS
TLI-PL7657B-1800-54W	54W	AC220-240V	Ø1812x57x76	5500lm	3.40	6PCS
TLI-PL7657B-1800-65W(Up&Down)	65W	AC220-240V	Ø1812x57x76	6500lm	3.40	6PCS
TLI-PL7657B-2400-72W	72W	AC220-240V	Ø2412x57x76	7300lm	4.50	2PCS
TLI-PL7657B-2400-96W(Up&Down)	96W	AC220-240V	Ø2412x57x76	9600lm	4.50	2PCS

OPTICS

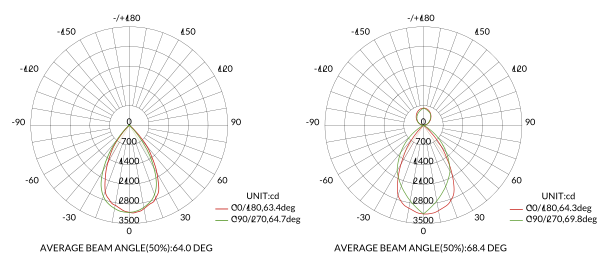

INSTALLATION & ACCESSORIES

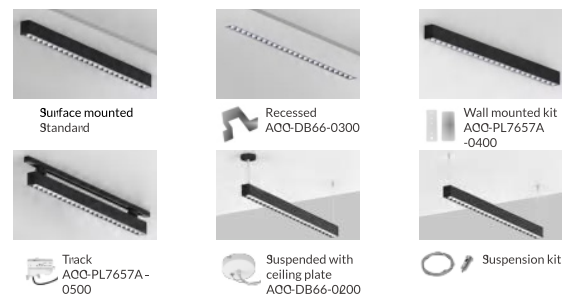

DIY connector

