

TLI-PL008

LOUVER PANEL LOW
GLARE UGR<19

TECHNICAL

Materials of Optics	PC
Materials of Housing	SPCC
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	73lm/120lm/110m
CRI	≥80
Beam Angle(°)	65°/75°
UGR	<19
Lifetime(hr)	50,000h
Product Finishing	White RAL9016


FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP40
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL008-3060-15W	15W	AC200-240V	295x595x31.5	570x270	1100lm(Black reflector) 1650lm(Matt silver) 1800lm(Bright silver)	1.47	5PCS
TLI-PL008-6060-30W	30W	AC200-240V	595x595x31.5	570x570	2220lm(Black reflector) 3300lm(Matt silver) 3600lm(Bright silver)	2.70	5PCS
TLI-PL008-6262-30W	30W	AC200-240V	620x620x31.5	595x595	2220lm(Black reflector) 3300lm(Matt silver) 3600lm(Bright silver)	2.90	5PCS
TLI-PL008-30120-30W	30W	AC200-240V	295x1195x31.5	1170x270	2220lm(Black reflector) 3300lm(Matt silver) 3600lm(Bright silver)	2.74	5PCS
TLI-PL008-60120-55W	55W	AC200-240V	595x1195x31.5	1170x570	4070lm(Black reflector) 6160lm(Matt silver) 6700lm(Bright silver)	5.28	2PCS

OPTICS

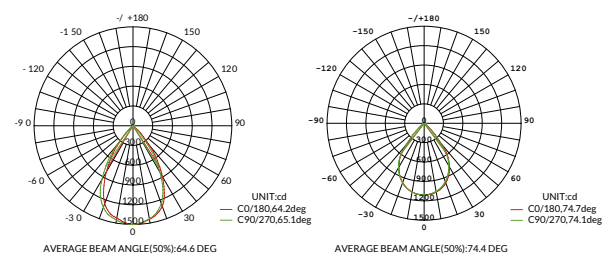

INSTALLATION & ACCESSORIES

