


# TLI-PL01

PATENTED SLIM FRAME  
BACKLIT LED PANEL

## TECHNICAL

Materials of Optics	PMMA (Lens)+PS (Diffuser)
Materials of Housing	SPCC
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	100/130 lm/W
CRI	≥80
Beam Angle(°)	120°
Lifetime(hr)	50,000h
Product Finishing	White RAL9016

## OPTICS

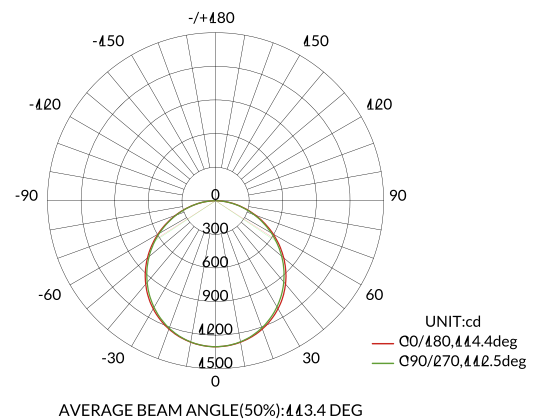


## FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP40
Power Factor (PF)	≥0.9
Certification	SAA/ CE/ CB

## INSTALLATION & ACCESSORIES



Recessed      Surface mounted      Suspended



## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL01-6060-36W	36W	AC200-240V	595x595x28	580x580	120LM/W	1.50	5/6PCS
TLI-PL01-6262-36W	36W	AC200-240V	620x620x28	605x605	120LM/W	1.82	5/6PCS
TLI-PL01-30120-36W	36W	AC200-240V	1195x295x28	1180x280	120LM/W	1.76	5/6PCS
TLI-PL01-6060-25W	25W	AC200-240V	595x595x28	580x580	130LM/W	1.50	5/6PCS
TLI-PL01-6262-25W	25W	AC200-240V	620x620x28	605x605	130LM/W	1.82	5/6PCS
TLI-PL01-30120-25W	25W	AC200-240V	1195x295x28	1180x280	130LM/W	1.76	5/6PCS
TLI-PL01-6060-28W	28W	AC200-240V	595x595x28	580x580	130LM/W	1.50	5/6PCS
TLI-PL01-6262-28W	28W	AC200-240V	620x620x28	605x605	130LM/W	1.82	5/6PCS
TLI-PL01-30120-28W	28W	AC200-240V	1195x295x28	1180x280	130LM/W	1.76	5/6PCS