

TLI-PL02

BACKLIT ENTIRE LIGHTING TROFFERLED PANEL LIGHT

TECHNICAL

Materials of Optics	PMMA (Lens)+PS (Diffuser)
Materials of Housing	Aluminum (Frame)
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	100lm/W
CRI	≥80
Beam Angle(°)	90°
UGR	<19
Lifetime(hr)	50,000h
Product Finishing	White RAL9016


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	Tunable white
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PL02-6060-36W	36W	AC200-240V	595x595x40	580x580	3700lm	2.60	5PCS
TLI-PL02-30120-36W	36W	AC200-240V	1195x295x40	1180x280	3700lm	2.99	5PCS
TLI-PL02-6262-36W	36W	AC200-240V	620x620x49	605x605	3700lm	2.73	5PCS
TLI-PL02-60120-60W	60W	AC200-240V	1195x595x49	1180x580	6500lm	5.41	2PCS

OPTICS

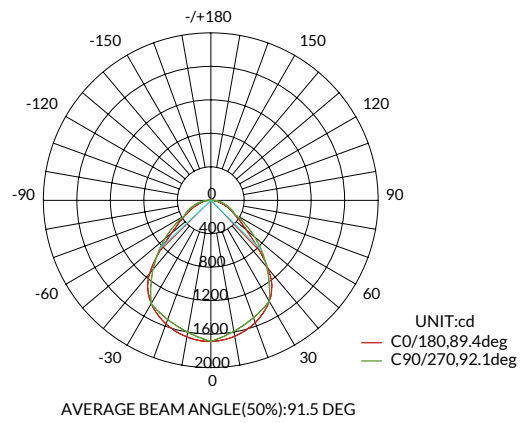

INSTALLATION & ACCESSORIES

