

# TLI-PL3535/TLI-PL5050

ALUMINUM LINEAR PROFILE  
WITH LED LUMINAIRE


## TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	-
Color Temperature	3000-6000k, RGBW
Luminous Efficiency@4000K	90Lm/W
CRI	>90
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	40,000h
Product Finishing	White/Black

## FEATURES & BENEFITS


LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

## OPTICS

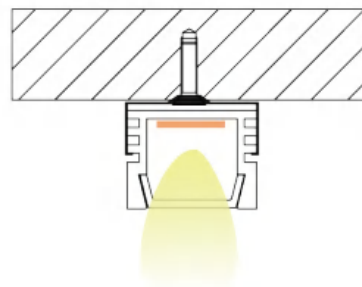

Installation method: surface mount and suspension

## DIMENSION

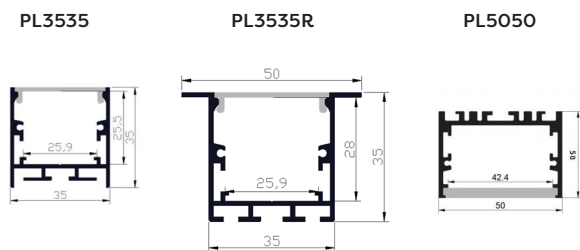

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-PL5050	10-40w/m	24v	3000X50X50	900LM/M
TLI-PL3535	10-40w/m	24v	3000X35X35	900LM/M
TLI-PL3535R	10-40w/m	24v	3000X50X35	900LM/M