



Introduction

1. Every three LED as a unit, flexible printed circuit boards, using double stick on the back, easy to install.
2. The standard length of each roll is 5meter.
3. Optional Color red/yellow/blue/green/white/warm white, Color temperature: 2300-6500K
4. Working Voltage: DC 12V/24V (3.5V/5V)
5. The products are divided into naked (IP33), half-waterproof (IP44), waterproof (IP64) and full waterproof (IP67).
6. All LED strip must be installed on an aluminium heat dissipation surface for warranty purposes.
7. TLI professional strip dimmable driver compatible most Australia dimmer, and C-bus, Dali. System.

SIZE:

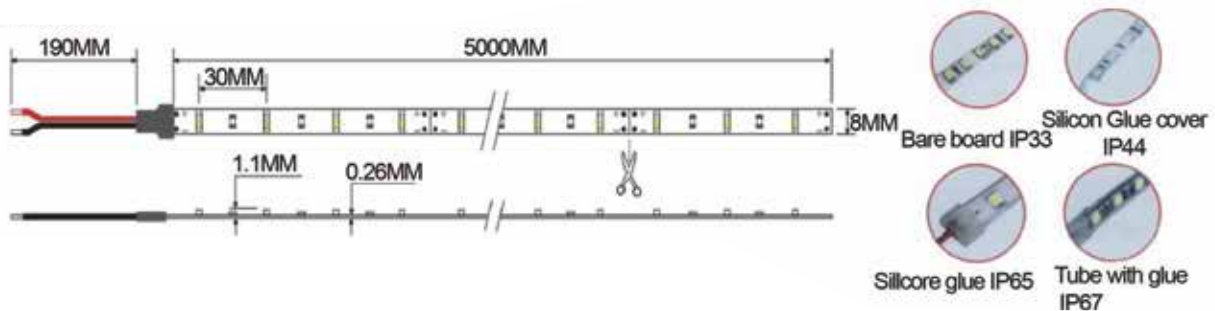

Led Rigid Modlar(Aluminum Plate PCB)

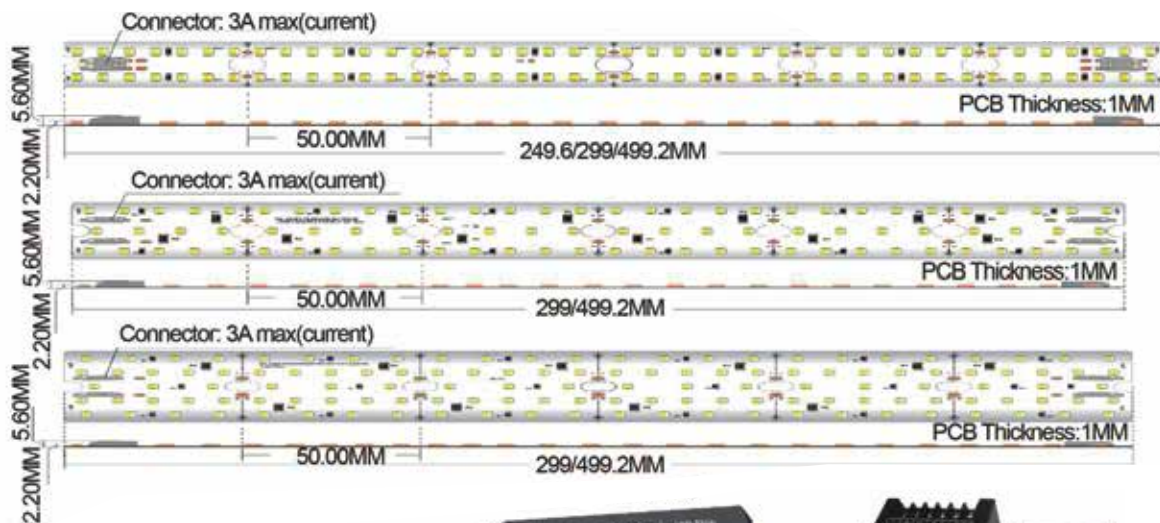

Driver 24W-250W
12V/24V driver



12-120W, 12V/24
DMX Dimmable
Dali Dimmable
0-10V Dimmable



RGB
Controller

CODE	Description	Voltage	Watt(W/M)	LEDs/M	Colour	Package	Qty/Ctn
TLI-BAR5050ST30-7W	IP33&IP44 IP65&IP67	DC12 DC24 DC5	7	30	ww,cw,red, blue,green, yellow,RGB	5M/roll	25
TLI-BAR5050ST60-14W			14	60			
TLI-BAR3528T60-5W			4.8	60			
TLI-BAR3528T120-10W			9.6	120			