


# LED Modular Floodlight

## TECHNICAL

Materials of Housing	Aluminium+ stainless steel
Light Source	Lumileds
Color Temperature	3000K, 4000K, 5700K
Luminous	140-200Lm/W
CRI	>85
Beam Angle(°)	15°, 25°, 60°, 110°, 130°x25°, 130°x40°, 130°x60°, Asymmetric
Lifetime(hr)	40,000h
Product Finishing	Black

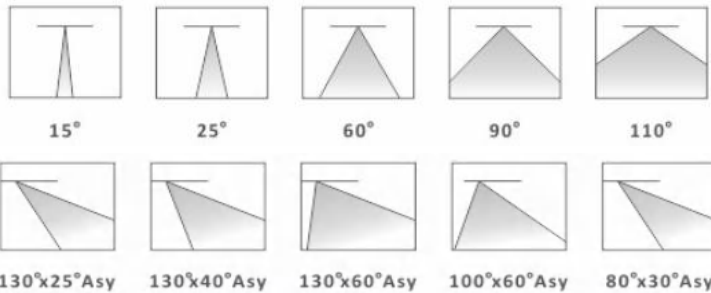

## FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 66
IK Rating	IK 10
Power Factor (PF)	≥0.95
Certification	SAA/ RoHS/ CE/ CB



## DATA SHEET

Power	INPUT VOLTAGE(V)	Dimension(AxBmm)	LUMEN(±5%)
230W	100-240VAC	340x370	35,100-210,700
230W-1350W	100-240VAC	390x685	35,100-210,700
230W-1350W	100-240VAC	390x890	35,100-210,700
230W-1350W	100-240VAC	700x685	35,100-210,700
230W-1350W	100-240VAC	700x890	35,100-210,700