



TLI-LOY9001

SLIM OYSTER

TECHNICAL


Materials of Housing	Steel+Diffuser
Light Source	CREE/Osram
Color Temperature	3000/4000/5500k
Luminous	97Lm/W
CRI	>85
Beam Angle(°)	120
Lifetime(hr)	40,000h
Product Finishing	White / Satin Chrome Frame



FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 54
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DIMENSION

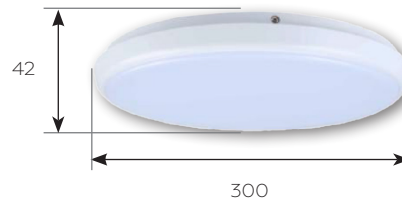

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-LOY9001-20W	20W	AC200-240V	Ø 300x42	1900-2000lm