



TLI-GARDEN BOLLARD

BOLLARD LIGHT

TECHNICAL


Materials of Housing	Aluminium
Light Source	E27
Color Temperature	3000/6000k
Luminous Efficiency@4000K	80Lm/W
CRI	>85
Lifetime(hr)	40,000h
Product Finishing	Black/Silver



FEATURES & BENEFITS

LED Driver	12/24V
Ingress Protection (IP Rating)	IP 44
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

INSTALLATION & ACCESSORIES

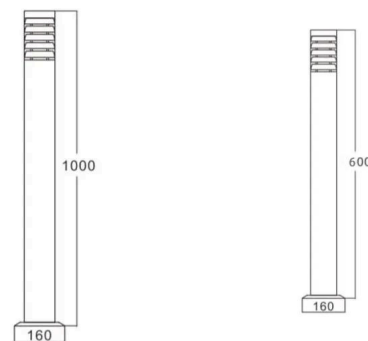

DATA SHEET

CODE	WATT	INPUT VOLTAGE	SIZE(AxBxCxDmm)	LUMEN(±5%)
TLI-Garden bollard-600	Max.50W	240V, 50Hz	ø101mmX600mm	4000lm
TLI-Garden bollard-1000	Max.50W	240V, 50Hz	ø101mmX1000mm	4000lm