



TLI-8501 1AL

GARDEN SPIKE LIGHT

TECHNICAL

Materials of Optics	-
Materials of Housing	Aluminium
Light Source	MR16
Color Temperature	3000/4000/6000k
Luminous Efficiency@4000K	80Lm/W
CRI	>85
Beam Angle(°)	36 °
UGR	-
Lifetime(hr)	40,000h
Product Finishing	Black


FEATURES & BENEFITS

LED Driver	12V Driver Sold separatly
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 65
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-85011AL	25W	DC 12V	Ø63X76x280	2000lm

OPTICS

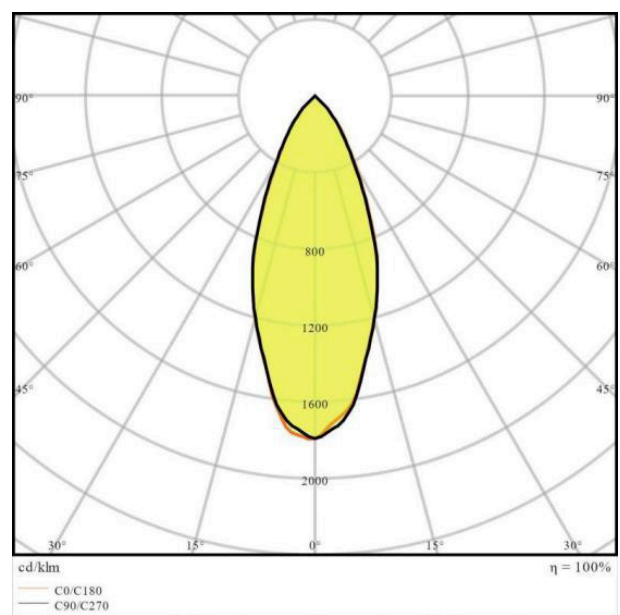

INSTALLATION & ACCESSORIES

