



TLI-WL-2X5W

ULTRA SLIM UP AND DOWN WALL LIGHT

TECHNICAL


Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD
Color Temperature	3000/4000/5700K
Luminous Efficiency@4000K	60Lm/W
CRI	>85
Beam Angle(°)	90-110°
Lifetime(hr)	30,000h
Product Finishing	White/Black



FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	N/A
Ingress Protection (IP Rating)	IP 54
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

DIMENSION

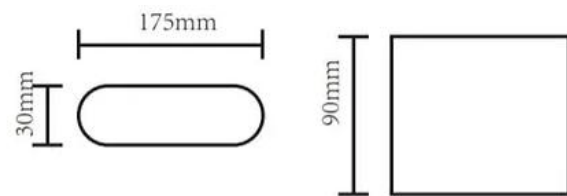

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-WL-2X5W-IP54	2x 5W	AC220-240V	175X90X30	600lm