


## TLI-PAL24A/B

NEW LIGHTING EXPERIENCE,  
NEW LIFE DIY SUSPENDED

### TECHNICAL

Materials of Optics	PC
Materials of Housing	ABS
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	80lm/W
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


### OPTICS

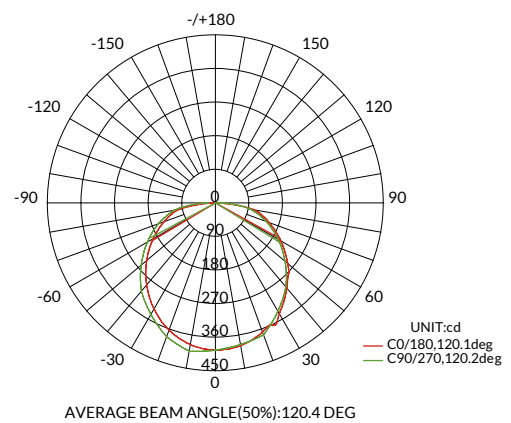

### FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Triac
Ingress Protection (IP Rating)	IP40
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

### INSTALLATION & ACCESSORIES



### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PAL24A-12-18W	18W	AC200-240V	Ø298x51	1450lm	1.08	10PCS
TLI-PAL24A-12-25W	25W	AC200-240V	Ø298x51	2000lm	1.08	10PCS
TLI-PAL24A-16-35W	35W	AC200-240V	Ø400x68	3100lm	1.89	6PCS
TLI-PAL24B-12-18W	18W	AC200-240V	Ø298x50x1525	1450lm	0.87	10PCS
TLI-PAL24B-12-25W	25W	AC200-240V	Ø298x50x1525	2000lm	0.87	10PCS
TLI-PAL24B-16-35W	35W	AC200-240V	Ø400x67x1542	3100lm	1.55	6PCS