

TLI-PAL99

EXTENSION DESIGN ADJUSTABLE DOWNLIGHT

TECHNICAL

Materials of Optics	PS
Materials of Housing	Aluminum
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	110lm/W
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection	2CCT/ 3CCT
LED Driver	Built-in
Dimming Option	DALI
Functions	Adjustable Power
Ingress Protection (IP Rating)	IP40
Power Factor(PF)	≥0.9
Certification	SAA/ CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PAL99-16-40W	40W	AC200-240V	Ø400x86	4300lm	3.20	6PCS
TLI-PAL99-24-60W	60W	AC200-240V	Ø600x86	6700lm	6.90	2PCS
TLI-PAL99-32-75W	75W	AC200-240V	Ø800x86	8000lm	11.00	1PCS
TLI-PAL99-40-100W	100W	AC200-240V	Ø1000x86	10700lm	16.20	1PCS

OPTICS

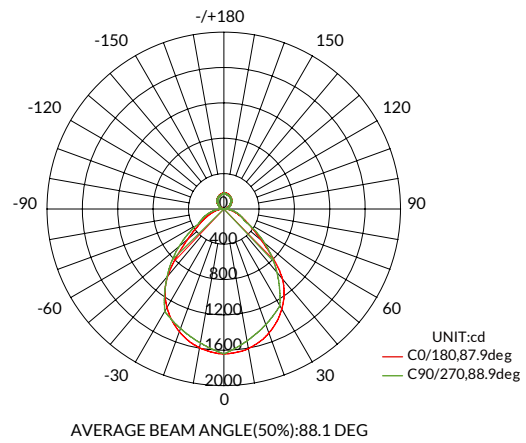

INSTALLATION & ACCESSORIES

