



TLI-PD88

SUSPENSION

TECHNICAL

Materials of Optics	PMMA
Materials of Housing	PC/ Aluminum
Light Source	COB (SDCM<3)
Color Temperature	3000/4000/5700K
Luminous Efficiency@4000K	105lm/W
CRI	≥80/90/97(1-CCT) ≥90(3CCT)
Beam Angle(°)	36(24°/30°/36°/45°/60)°
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac/ DALI
Ingress Protection (IP Rating)	IP20
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB


DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-PD88-10W	10W	AC220-240V	Ø55x1265	1100lm	0.55	12PCS



OPTICS

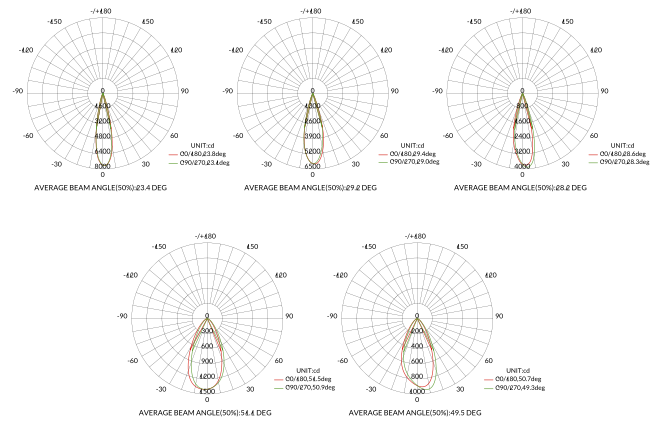

INSTALLATION & ACCESSORIES

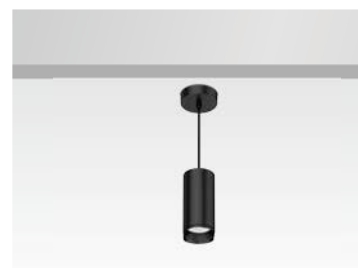

Suspended



PRO-0100-W PRO-0100-B