




TLI-FL101

WATERPROOF SURFACE MOUNTED SPOT LIGHT

TECHNICAL


Materials of Optics	-
Materials of Housing	Aluminium
Light Source	CREE/Osram
Color Temperature	3000/4000/5500k
Luminous Efficiency@4000K	115Lm/W
CRI	>90
Beam Angle(°)	15°/24°/36°/48°
UGR	-
Lifetime(hr)	40,000h
Product Finishing	Black

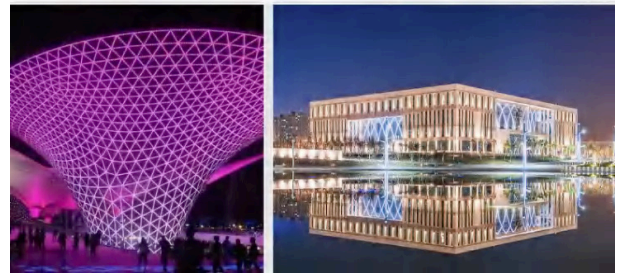

FEATURES & BENEFITS

CCT Selection DIP Switch	-
LED Driver	Built-in
Dimming Option	Triac/ DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP 65
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

INSTALLATION & ACCESSORIES



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-FL101	10W	DC24V	Ø82x130x90x95	1150lm