





## TLI-TR30-25W

LED MODULE SYSTEMS  
DIMMABLE AND BEAM ANGLE ADJUSTABLE

### TECHNICAL

Materials of Housing	Aluminium
Color Temperature	3000/4000/5700K
Luminous Efficiency@4000K	100Lm/W
CRI	>85
Beam Angle(°)	75°
Lifetime(hr)	50000H
Product Finishing	White/Black

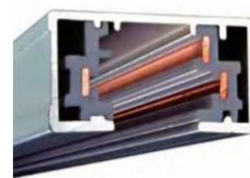


Adapter in both 3 wire and 4 wire track version

### FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 20
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

### INSTALLATION & ACCESSORIES

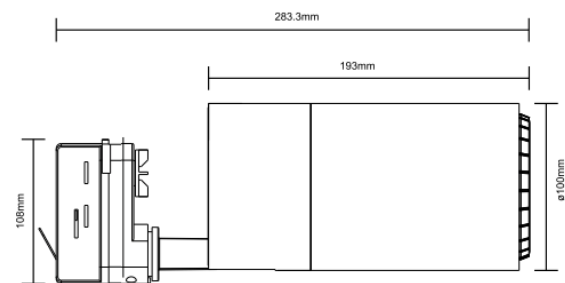

### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)
TLI-TR30-25W	25W	AC200-240V	Ø100X193	2500lm