


# TLI-WL10201

FLOWERPOT SHAPE WITH UP&DOWN LIGHTING

## TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium+PC
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	95lm/W
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005

## OPTICS

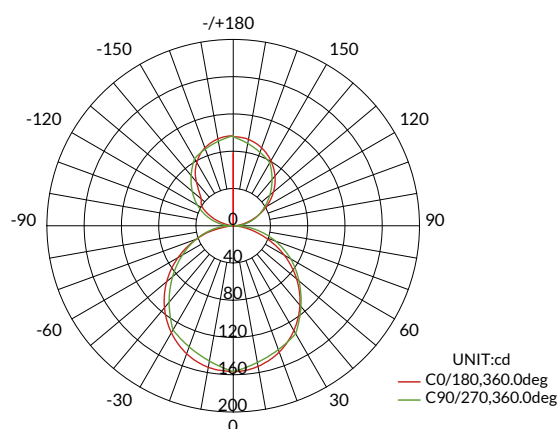


AVERAGE BEAM ANGLE(50%):360.0 DEG

## FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	RoHS/CE

## INSTALLATION & ACCESSORIES



Wall mounted

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL10201-8W	4.8W+3.2W	AC220-240V	242x67x67	770lm	0.60	24PCS