

TLI-WL10501

ROUND BACKLIT WALL LIGHT


TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium+PC
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	84lm/W
CRI	≥80
Beam Angle(°)	90°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac
Functions	-
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/CE


OPTICS

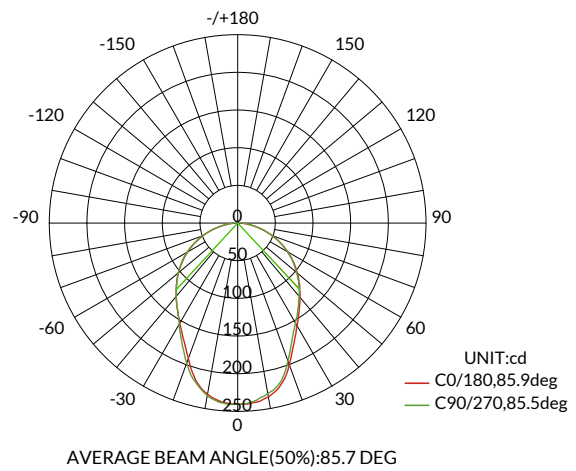

INSTALLATION & ACCESSORIES

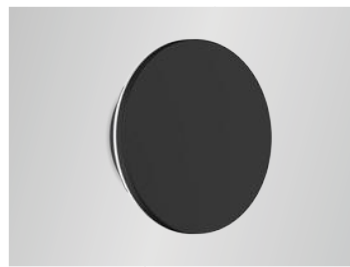

Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL10501-8W	8W	AC220-240V	Ø160x50	640lm	0.50	18PCS
TLI-WL10501-15W	15W	AC220-240V	Ø250x50	1260lm	1.00	12PCS