



• Up&down lighting




TLI-WL14601

ULTRA-THIN LINEAR WALL WASHER

TECHNICAL

| | |
|---------------------------|------------------------------|
| Materials of Optics | PMMA |
| Materials of Housing | Aluminium |
| Light Source | SMD (SDCM<6) |
| Color Temperature | 3000/4000/5000K |
| Luminous Efficiency@4000K | 120lm/W |
| CRI | ≥80 |
| Beam Angle(°) | 40° |
| Lifetime(hr) | 50,000h |
| Product Finishing | White RAL9016/ Black RAL9005 |

OPTICS

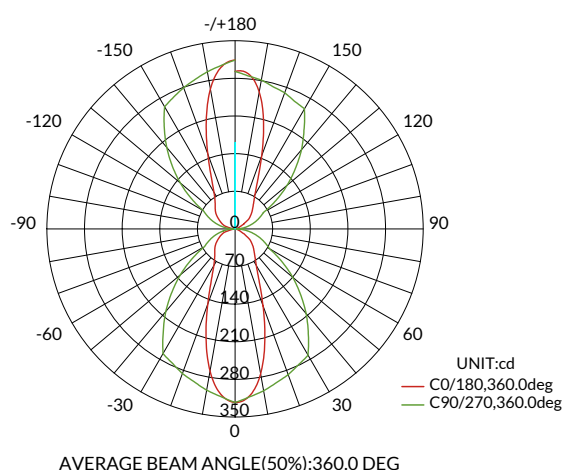


FEATURES & BENEFITS

| | |
|--------------------------------|----------|
| CCT Selection DIP Switch | 3CCT |
| LED Driver | Built-in |
| Dimming Option | Triac |
| Ingress Protection (IP Rating) | IP20 |
| Power Factor (PF) | ≥0.9 |
| Certification | RoHS/CE |

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

| CODE | WATT | INPUT VOLTAGE | DIMENSION(mm) | LUMEN(±5%) | Net(kgs) | Qty/CTN |
|---------------------|-------|---------------|---------------|------------|----------|---------|
| TLI-WL14601-180-8W | 2x4W | AC220-240V | 180x38.5x90 | 1000lm | 0.50 | 12PCS |
| TLI-WL14601-240-10W | 2x5W | AC220-240V | 240x38.5x90 | 1200lm | 0.65 | 12PCS |
| TLI-WL14601-360-16W | 2x8W | AC220-240V | 360x38.5x90 | 1900lm | 0.90 | 12PCS |
| TLI-WL14601-600-20W | 2x10W | AC220-240V | 600x38.5x90 | 2300lm | 1.23 | 12PCS |