




# TLI-WL75001

ULTRA-THIN  
POWER BANK DESIGN

## TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum ADC12
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	113lm/W
CRI	≥80
Beam Angle(°)	29° x77° x8°(WL-75001)/120°(WL-75001B)
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/ Black RAL9005

## OPTICS

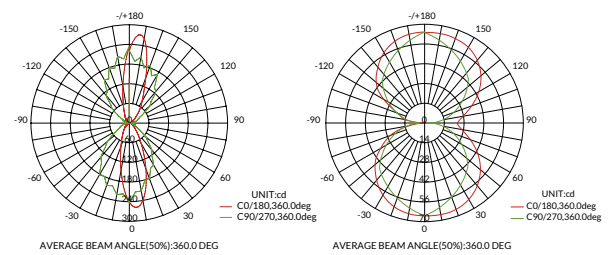


## FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Ingress Protection (IP Rating)	IP44
Power Factor (PF)	≥0.8
Certification	SAA/ RoHS/CE

## INSTALLATION & ACCESSORIES



Wall mounted



## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL-75001-6W	6W	AC220-240V	135x90x30.5	680lm	0.47	18PCS
TLI-WL-75001B-6W	6W	AC220-240V	135x104x30.5	530lm	0.47	18PCS
TLI-WL-75001-10W	2x5W	AC220-240V	175x90x30.5	1060lm	0.57	18PCS
TLI-WL-75001B-10W	2x5W	AC220-240V	175x104x30.5	840lm	0.57	18PCS