



TLI-WL85020AL

TRI-COLOR CYLINDER WALL LIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	113lm/W
CRI	≥80
Beam Angle(°)	45°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL85020AL-8W	8W	AC220-240V	143x70x95	850lm	0.77	24PCS
TLI-WL85020AL-15W	2x7.5W	AC220-240V	179x70x95	1700lm	0.91	12PCS


OPTICS

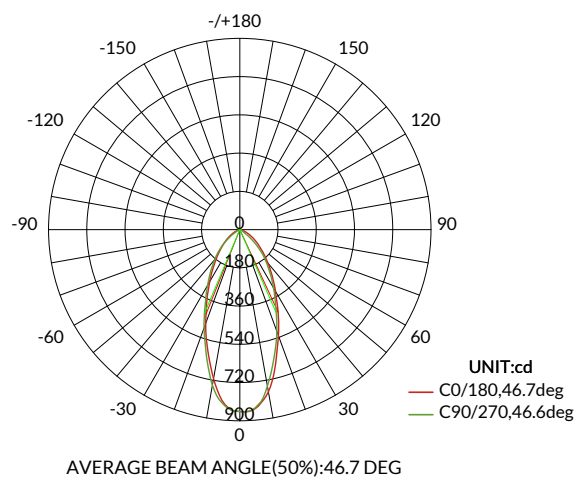

INSTALLATION & ACCESSORIES



Wall mounted



WL85020AL-8W WL85020AL-15W