


TLI-WL85030AL

WALL WASHER LIGHT

TECHNICAL

Materials of Optics	PC/ Glass
Materials of Housing	Aluminum ADC12
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	75lm/W
CRI	≥80
Beam Angle(°)	60°x115°x40°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005


OPTICS

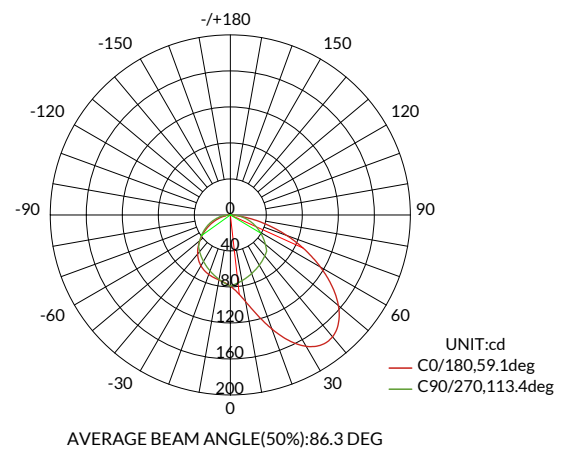


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac
Functions	-
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	RoHS/CE

INSTALLATION & ACCESSORIES

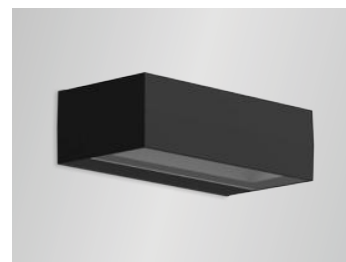

Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL-85030AL-10W	10W	AC220-240V	200x100x60	750lm	0.71	12PCS
TLI-WL-85030AL-15W	15W	AC220-240V	300x100x60	1100lm	1.09	12PCS