


TLI-WL9101

TEMPERED GLASS COVER
3CCT CHANGEABLE

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum ADC12
Light Source	SMD (SDCM<6)
Color Temperature	3000/4000/5000/5700K
Luminous Efficiency@4000K	100lm/W
CRI	≥80
Beam Angle(°)	45°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	Black RAL9005

OPTICS

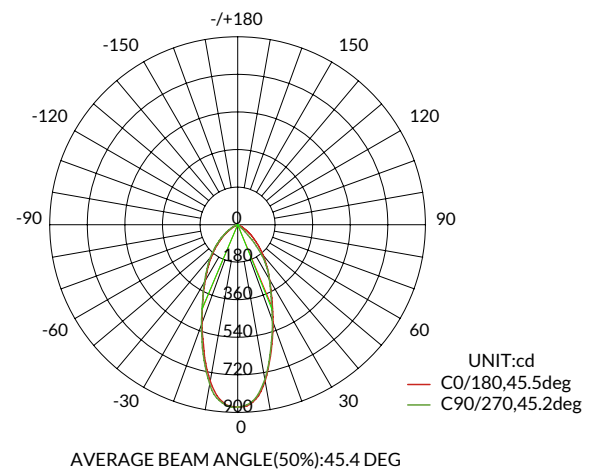


FEATURES & BENEFITS

CCT Selection DIP Switch	3CCT
LED Driver	Built-in
Dimming Option	Triac
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	LUMEN(±5%)	Net(kgs)	Qty/CTN
TLI-WL9101-8W	8W	AC220-240V	202x121x95	800lm	0.50	12PCS