



TLI-DN120

IP RATED DOWNLIGHT WITH
ADJUSTABLE BEAN ANGLE

TECHNICAL

Materials of Optics	Glass
Materials of Housing	Stainless steel 316
Light Source	COB
Color Temperature	2700K/3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	>90
Beam Angle(°)	24°/45°
UGR	n/a
Lifetime(hr)	50,000H
Product Finishing	Stainless steel


FEATURES & BENEFITS

CCT Selection	-
LED Driver	Built-in
Dimming Option	Triac/0-10v/DALI
Functions	Angle Adjustable
Ingress Protection (IP Rating)	IP67
Impact Resistance (IK Rating)	IK08
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN120-10W	10W	AC220-240V	Ø140X150	Ø120	900lm

OPTICS

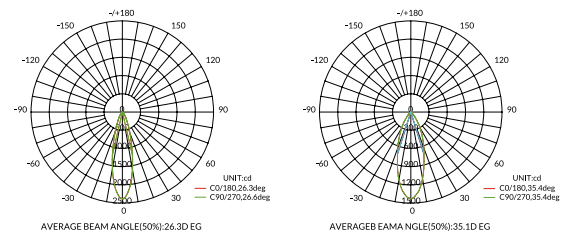

INSTALLATION & ACCESSORIES

